

 INCA®

**FIRESTOP
PUTTY**

FM012

TOTAL FIRESTOP

310ml

 INCA®



IFTI

**Firestop
Putty**

FM012

TOTAL FIRESTOP

310ml



**FIRESTOP
PUTTY**


FM012



TOTAL FIRESTOP

310ml

Produced in Germany
www.inca-putty.com

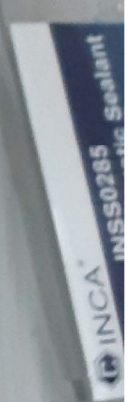







INCA®







INCA Fire Barrier Silicone Sealant

防火 填縫膠



FILL, VOID OR CAVITY MATERIAL
FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS
SEE UL FIRE RESISTANCE DIRECTORY
International CA rhide Technology Co., Ltd.
INCA Fire Barrier Silicone Sealant INSS2460+

INCA
4400G

INSTALLATION:

Choose the appropriate sealant for the application data sheets or the INCA Directory of other directions. The special skills or tools are required for adhesion, all surfaces should be clean, grease, oil, loose materials, etc. Apply the required sealant. The INCA Sealant INSS2460 is suitable for use in opening (use the INCA Fire Barrier Silicone Sealant INSS2460). Make sure the sealant is applied to the surface of the opening. The installation instructions include the following:



INCA Fire Barrier Silicone Sealant INSS2460

**防火
填縫膠**



**FILL, VOID OR CAVITY MATERIAL
FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS
SEE UL FIRE RESISTANCE DIRECTORY
International CA rside Technology Co.,Ltd.
INCA Fire Barrier Silicone Sealant INSS2460+
INCA
44DG**

INSTALLATION:

Choose the appropriate firestop system application data sheets, the UL Fire Directory or other directories of acceptable special skills or tools are required. To ensure adhesion, all surfaces shall be clean and free of grease, oil, loose materials, rust or other contaminants. Apply the required depth of INCA Fire Barrier Sealant INSS2460 beginning on the opening (use over various backing materials). Make sure the INCA Fire Barrier Sealant INSS2460 makes complete contact with the surface of the opening and also the surrounding penetrating item. The suggested installation include: putty knife and trowel.



凝固型防火泥 FM012

Firestop Putty

FM012凝固型防火泥為具有膨脹性的單體式防火材料，適用於填塞金屬管或風管的貫穿結構縫隙及填塞後表面修補，具有三小時的防火時效。同時，暴露於超過 1×10^4 Gy (1×10^4 rad) 中子及伽馬輻射單位下，仍能保持正常防火功能。

使用方法

- 清潔開孔
 - 對於較大孔洞可先在內部填塞礦纖棉輔助
 - 用刮刀塗佈FM012，建議塗敷厚度為13mm~25mm
 - 沾水抹平表面
- (如有防火時效要求，請選擇登錄在UL防火名錄或CNS測試報告上適當的耐火系統工法施工)
- ※禁止用於食品

使用範圍 金屬管、保溫管或風管貫穿防火區劃等開口的防火填塞及縫隙填補。

產品特性


- 水基性可清洗
- 單體式即用型，施工簡單
- 不含鹵素、石棉等有害物質
- 耐燒蝕性佳、遇熱膨脹體堅實不垂流

產品規格

密度	約1.35-1.45g/cm ³
顏色	磚紅色
硬化時間	7-14天
操作溫度	5°C-40°C
儲存溫度	10°C-30°C
適用規範	UL1479 三小時 F Rating 測試 CNS14514 三小時 B種測試
包裝	<input type="checkbox"/> 20Kg/桶 <input type="checkbox"/> 5Kg/桶

INSTALLATION

Choose the appropriate firestop system using INCA application data sheets, the UL Fire Resistance Directory or other directories of acceptable designs. No special skills or tools are required. To ensure adequate adhesion, all surfaces shall be clean and free of dust, grease, oil, loose materials, rust or other substances. Apply the required depth of INCA Firestop Putty FM012 beginning on the edge of the opening (use over various backing materials as required). Make sure the INCA Firestop Putty FM012 makes complete contact with the inside surface of the opening and also the surface of the penetrating item. The suggested method(s) of installation include: caulking gun, putty knife and trowelling.



FILL VOID OR CAVITY MATERIAL
FOR USE IN THROUGH-PENETRATION FIRESTOP SYSTEMS
SEE UL FIRE RESISTANCE DIRECTORY
International Carbide Technology Co., Ltd.
INCA Firestop Putty FM012
INCA
440G

國碳科技股份有限公司 保存期限：一年(在室溫下)
製造日期(年/月/日)：
International Carbide Technology Co., Ltd. 標示於桶身
TEL:03-3240001 FAX:03-3240006 MADE IN TAIWAN

www.incatech.com.tw



Fire Retardant



Fire Retardant



Fire Retardant

100% 2001 APPROVED
For the Edvaine East and Tilly

Fire Retardant



Fire Retardant

Fire Retardant

Fire Retardant



Fire Retardant



Fire Retardant



Fire Retardant

Fire Retardant



Fire Retardant



Fire Retardant

Fire Retardant



Fire Retardant

Fire Retardant




INSS2460

Fire Barrier Silicone Sealant



Package: 25.8 kg (57 lbs)
Net Weight: 24.5 kg (54 lbs)
Net Volume: 1.1 m³ (39 cu ft)




INSS2460

Fire Barrier Silicone Sealant



Package: 25.8 kg (57 lbs)
Net Weight: 24.5 kg (54 lbs)
Net Volume: 1.1 m³ (39 cu ft)




INSS2460

Fire Barrier Silicone Sealant



Package: 25.8 kg (57 lbs)
Net Weight: 24.5 kg (54 lbs)
Net Volume: 1.1 m³ (39 cu ft)




INSS2460

Fire Barrier Silicone Sealant



Package: 25.8 kg (57 lbs)
Net Weight: 24.5 kg (54 lbs)
Net Volume: 1.1 m³ (39 cu ft)



Fireproof Blanket FB01-15

DENSITY	128Kg/M ³ (8P)
SIZE	13x600x7200mm/Roll
PACKED	2Rolls/Case
N.W.	34.20 LBS (15.5KG)
G.W.	37.50 LBS (17.0KG)
MEASUREMENT	4.60 CUFT
DATE OF MAG.	20190902



International Carbide Technology Co., Ltd.
<http://www.incatech.com.tw/>

MADE IN TAIWAN



Fireproof Blanket FB01-15

DENSITY	128Kg/M ³ (8P)
SIZE	13x600x7200mm/Roll
PACKED	2Rolls/Case
N.W.	34.20 LBS (15.5KG)
G.W.	37.50 LBS (17.0KG)
MEASUREMENT	4.60 CUFT
DATE OF MAG.	20190902




International Carbide Technology Co., Ltd.
<http://www.incatech.com.tw/>

MADE IN TAIWAN

MADE IN TAIWAN

18.

- 80竹器
- 雙面膠、牛皮紙
- PVC、保潔膜、藍膠
- 工業膠帶
- 電子工業膠帶
- 專業維修膠帶

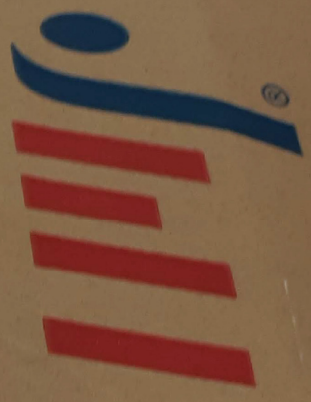





Firestop Sheet
防火封堵板材 (防火片板)

Firestop Sheet FP02

產品規格

尺寸 90cm X 90cm

厚度 7.7±1.3mm

數量 1片

Firestop Sheet FP04 +

產品規格

尺寸 90cm X 90cm

厚度 ≥2mm

數量 4片

Mfg. Date :

Inspection :



INternational CArbide Technology Co., Ltd.

No.1-17, Toa-Chan, 12Ling, Kern-Ko Village, Lu-Chu Hsiang, Taoyuan 338, Taiwan

TEL: +886-3-3240001 FAX: +886-3-3240006