




Access



Video



Software



Technology



Performa® Series Proximity Plus® Cards and Key Tags

Globally accepted 13.56 MHz operating frequency

Compatibility with Sielox's Performa® readers

Pre-programmed customer-specific ID numbers

Available in clamshell, graphics-quality direct print or Key Tag

AC-12 Series

Sielox's Performa® Proximity Plus® cards set the standard for performance and cost-effective solutions for access control. Utilizing the globally accepted frequency of 13.56 MHz ensures compatibility with Sielox's Performa® readers.

Sielox's innovative flipchip assembly design provides for the highest reliability proximity cards available. Performa Proximity Plus cards utilize a passive, no-battery design allowing for an infinite number of reads.



Clamshell



**Graphics Quality
Direct Print**



Key Tag

Product Specifications

Typical Read Range

Up to 5" with Performa® Proximity Switch Plate Reader (13 cm)


Up to 4" with Performa® Proximity Mullion Mount Reader (10 cm)

Operating Temperatures

-4°F to + 158°F
20°C to + 70°C

Model Numbers

AC-12 (Clamshell)
AC-12P (Graphics-Quality Direct Print)
AC-12M (Graphics-Quality Direct Print w/Magnetic Stripe)
AC-12T (Key Tag)

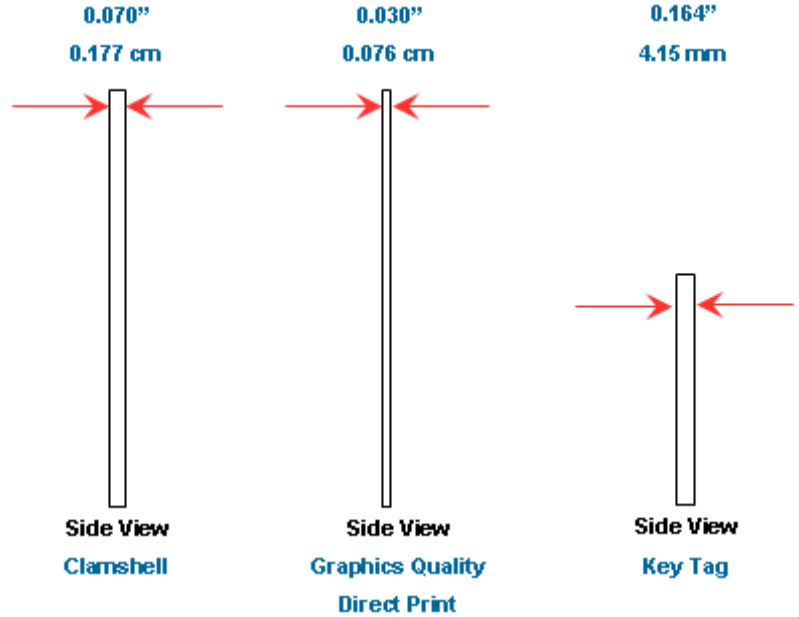

2.12" / 54.04 mm
Clamshell



2.12" / 54.04 mm
Graphics Quality Direct Print
Also available with Magnetic Stripe

3.37" / 8.55 mm



1.25" / 3.17 mm
Key Tag

1.58" / 4.01 mm

170 East Ninth Avenue, Runnemede, NJ 08078 | 856-939-9300 | Toll free: 800-424-2126 | Fax: 856-939-9309 | info@sielox.com