

FIXTURES - FLEXIBLE - KURV




| PRODUCT | MOUNTING | IP | CCT | OUTPUT | LENS/ENCAPSULATED | POWER IN | CONNECTOR IN | POWER OUT | CONNECTOR OUT | LENGTH (in) |
|-----------------|------------|--|-------------------|------------------------|--|---------------------|--|---------------------|--|-------------|
| KURV | | | | | | | | | | |
| White Snug Clip | WSC | DRY IP20 | 20 - 2000K | SO - Standard | ENC/CL - Encapsulated in Clear ENC/TL - Encapsulated in Translucent | BTM - Bottom | BR - Bare Wire 24" BRL - Barrel | BTM - Bottom | BR - Bare Wire 24" BRL - Barrel | |
| Rigid Lock Clip | RLC | | 27 - 2700K | HO - High | | LFT - Left | | LFT - Left | | |
| Magnetic Clip | MC | | 30 - 3000K | VHO - Very High | | RGT - Right | | RGT - Right | | |
| Side Graze Clip | SGC | | 35 - 3500K | | | END - End | | END - End | | |
| Joiner Clip | JC | | 40 - 4000K | | | SDE - Side | | CLS - Closed | | |
| | | DMP IP43 WET IP66 | 24 - 2400K | | | | | SDE - Side | | |
| | | | 27 - 2700K | | | | | | | |
| | | | 30 - 3000K | | | | | | | |
| | | | 35 - 3500K | | | | | | | |
| | | | | | | | | | | |


FIXTURE OUTPUT Tested for BOXA-DRY-30-XX-XX [L70 = 40000 HRS]
For Lumen Output of other part numbers use the Lumen Multiplier Resource Document.

| Nominal Length (in) | Actual Length (in) | SO | | | HO | | | VHO | | |
|---------------------|--------------------|---------------------|-----|-------|-----------------|-----|-------|----------------------|-----|-------|
| | | Standard - 1.5 w/ft | | | High - 3.0 w/ft | | | Very High - 5.0 w/ft | | |
| | | LM | CRI | Watts | LM | CRI | Watts | LM | CRI | Watts |
| 6 | 6.16 | 0 | X | X | X | X | X | X | X | X |
| 12 | 12.16 | 5 | 5 | 5 | X | X | X | X | X | X |
| 24 | 24.16 | X | X | X | X | X | X | X | X | X |
| 48 | 48.16 | X | X | X | X | X | X | X | X | X |

DIMENSIONS




Fixture Side View (Standard)




Fixture Side View (Seamless)


POWER IN

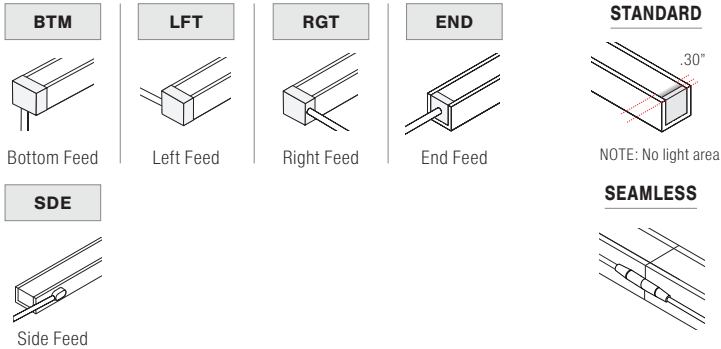


CONNECTOR IN




MOUNTING

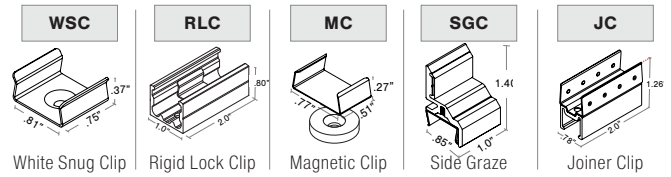


LENS/ENCAPSULATED

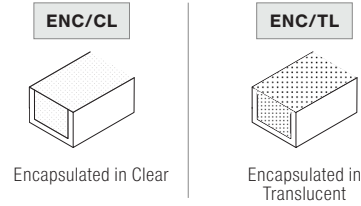

POWER OUT

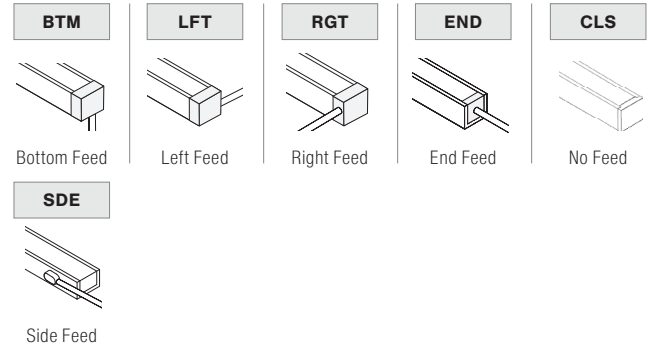

CONNECTOR OUT



NOTE

- Field modifications are not covered under Q-Tran warranty.

| PROJECT NAME | DATE | COMPANY | TYPE | NOTE |
|--------------|------|---------|------|------|
| | | | | |