



Wireless Outdoor Lighting Control

Enhance energy efficiency, security and building performance



Wireless Outdoor Lighting Control Solution

Exterior lighting, especially in parking lots and garages, represents a significant aspect of facility operations and maintenance, and it is often controlled independent of other building systems. Limelight by Lutron streamlines specification and design, makes your exterior lighting smarter, and can connect to Lutron Enterprise Vue software to control all building lighting from a single sign-on.



Why Wireless?

Wireless means easier commissioning and installation, and High Density Mesh (HDM) technology ensures reliable communication and extended range.

A node in every fixture provides occupancy, daylighting, and power measurement capability. Jobs typically require only a day or two for on-site startup.

Once installed, facility managers have quick access to fixture status from a smart device and receive real-time alerts for more efficient management of outdoor lighting.



In-fixture and on-fixture options



Offered by many Lutron OEM partners

- **Sensors and control modules** specifically designed for parking garage and parking lot environments
- **HDM (High Density Mesh)** wireless technology ensures extremely reliable, long-range performance in outdoor environments


System Overview

Limelight by Lutron offers smart-fixture data that meets your needs

- **Simple system design** – Just count the number of outdoor fixtures.
- **Single gateway control** – Control up to 800 luminaires with no repeaters necessary. A cellular gateway option requires no connection to the building network and eliminates the need for ethernet drops.
- **Scheduling** – Adjust light levels for predictable events. Use time-of-day, occupancy, and/or daylighting functionality: e.g., disable occupancy sensors during work hours, enable for after-hours.
- **Intelligent fixture groupings** – Program entire floor or area to turn on when an occupant enters from a stairwell or elevator; have all lighting in the lot turn on in response to an entering vehicle.
- **Reactive events** – Adjust light levels based on daylight and/or occupancy sensor data, and save energy while ensuring adequate illumination.
- **Safety feature** – Include grouped occupancy setting, custom unoccupied lighting level to accommodate security cameras, and immediate email alerts in response to fixture issues.

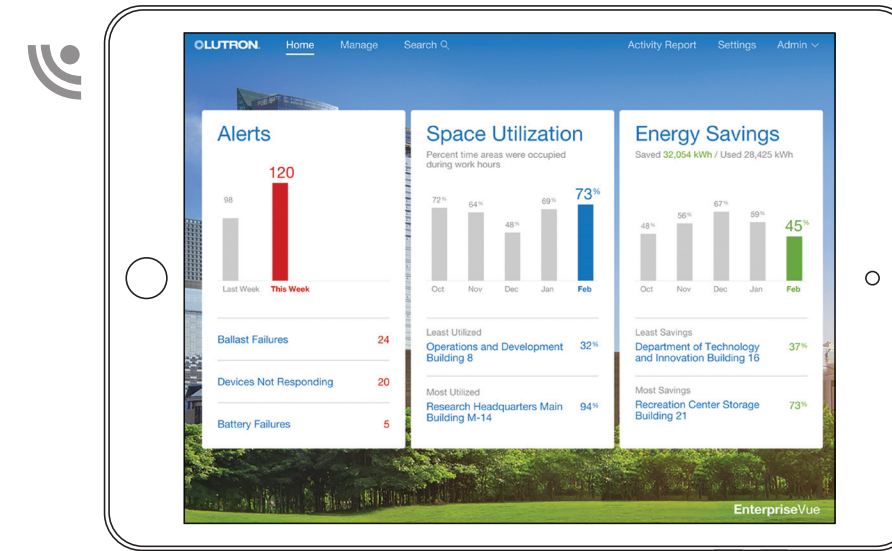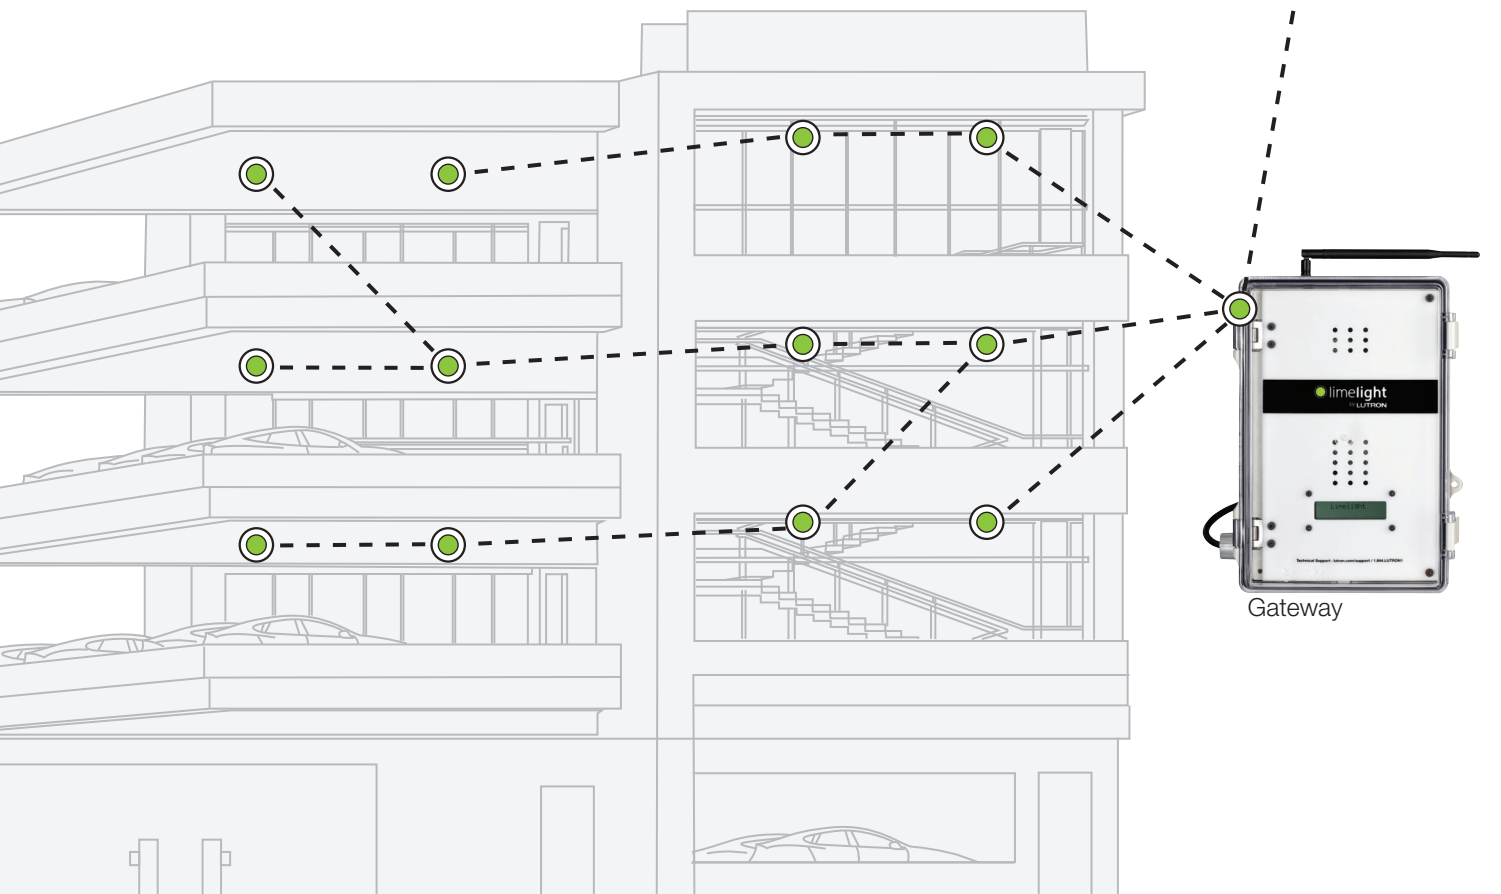

Enterprise Vue
Combines data from multiple Lutron systems, giving you a comprehensive picture of your campus — so you can make informed, actionable decisions.

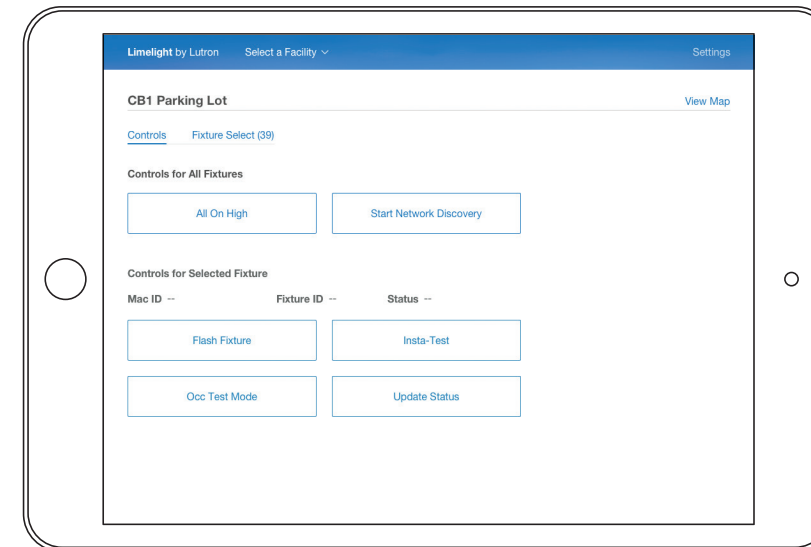

Limelight
Equips facility managers with fixture status, light override capability, and system alerts that enable more informed management of outdoor lighting.

Enterprise Vue – Connected Campus

Manage data and operations for multiple Lutron lighting and shade control solutions

- A single data and management platform for your connected buildings
- The system interface delivers a simple, consistent user experience from any PC or tablet
- Open, easy integration with BACnet and web APIs leverages the IoT to enhance smart-building performance


Enterprise Vue

limelight

limelight

vive

QUANTUM

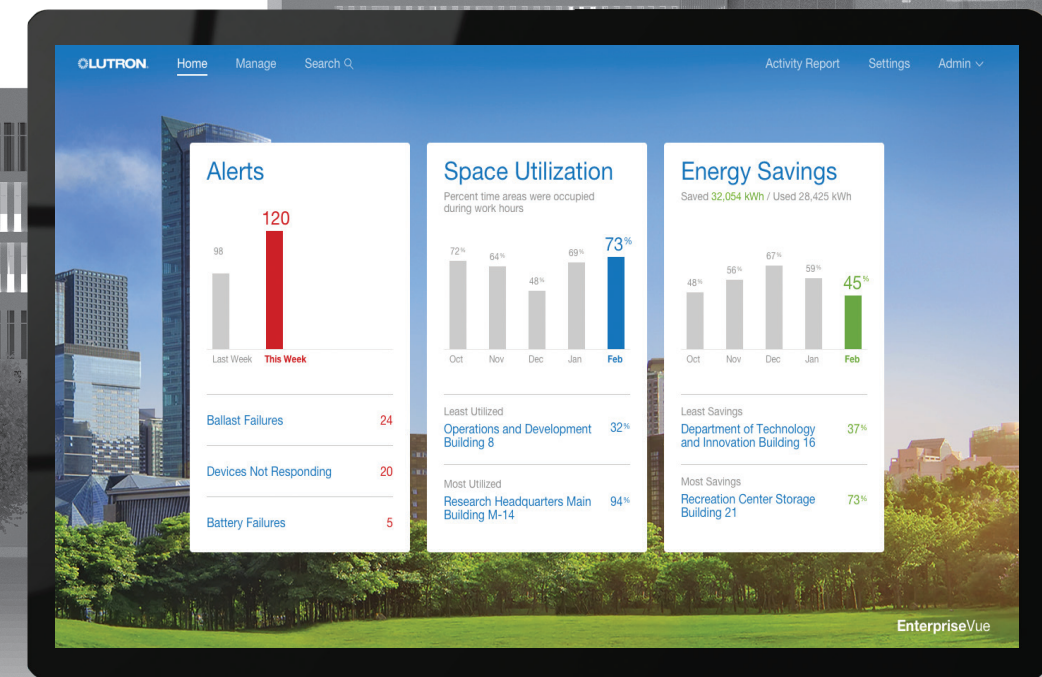

Enterprise Vue home screen

Ordering Guide



Product type:

Model numbers:



Gateway 120V

The Limelight gateway with ethernet connection

LL-ETHGATE



Gateway 120V

The Limelight gateway with cellular connection

LL-CELLGATE



External fixture mount radio and sensor module 120-277V

Limelight radio module with built-in daylight sensor and PIR occupancy sensor

LL-EXTMOUNT


OEM Installed



Internal fixture mount radio module 120-277V

Limelight radio module for internal fixture mounting by the OEM, intended to be paired with a LL-PIR integrated into the fixture

LL-INTMOUNT



Sensor module

Limelight PIR sensor with built-in daylight sensor and PIR occupancy sensor for integrating into a fixture at the OEM. Connects to a LL-INTMOUNT radio module

LL-PIR

lutron.com

Lutron Electronics Co., Inc.,
7200 Suter Road, Coopersburg, PA 18036-1299

© 1/2019 Lutron Electronics Co., Inc. | P/N 367-2798 REV C

Customer Assistance

Online: lutron.com/help

Email: support@lutron.com

Phone: 1.844.LUTRON1 (588.7661)

includes 24/7 technical support