




Request a Quote

[Express Ordering](#) [Quotes \(1\)](#) [Shopping Cart \(0\)](#)

[Markets](#) > [Consumer](#) > [Motorcycle](#) > [Chain Lubes](#) > [Tribolube 9](#) > [View Items](#)

Tribolube 9

[Printable Page](#) [Download PDF](#) [Email This Page](#)

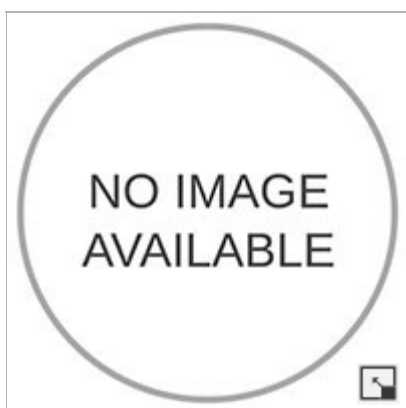

Tribolube-9 is a multipurpose synthetic grease with a wide operating temperature range from -80 °F to 400 °F, excellent antiwear and antiseize properties, and long life. It can be used up to 600 °F depending upon bearing speed and load, operating environment, and lubrication frequency. Molybdenum disulfide solid lubricant is used in this grease to enhance extreme pressure properties and help absorb shock loads. Conforms to the performance requirements of MIL-G-81827.

To request the latest MSDS

[+ more](#)

1 - 6 of 6 | Results Per Page 25 | View

1

Request Information

Compare Items

| Item # | Item Name | List Price | Add To Cart/Request Quote |
|--------------------------------|----------------------------|----------------------------|--|
| PC09-2013.5.CA | Tribolube-9, 13.5-Oz. Cart | \$11.70 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |

| | | | |
|------------------------------|----------------------------------|------------|--|
| PC09-3001.J | Tribolube-9, 1-Lb. Can (Pt) | \$11.70 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |
| PC09-3005.C | Tribolube-9, 5-Lb. Can | \$58.50 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |
| PC09-3035.PM | Tribolube-9, 35-Lb. Pail (5 Gal) | \$327.40 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |
| PC09-3120.D | Tribolube-9, 120-Lb. Drum | \$936.20 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |
| PC09-3380.D | Tribolube-9, 380-Lb. Drum | \$2,800.00 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |

1 - 6 of 6 | Results Per Page 25

| View  

1



All trademarks, trade names, or logos mentioned or displayed are the property of their respective owners, and are used only for technical or informational purposes.



Address

1600 Georgesville Road
Columbus, Ohio 43228

Contact

Toll-Free: 800.441.9160

Phone: 614.878.3600

Fax: 614.878.1600

Links

- [Privacy Policy](#)
- [Sitemap](#)
- [News & Events](#)

Aerospace Lubricants, Inc. has made every effort to properly capitalize, punctuate, identify and attribute trademarks and tradenames to their respective owners, including the use of ® and ™ (TM) wherever possible and practical

© 2018 Aerospace Lubricants, Inc., All Rights Reserved | Site created by Thomas Marketing Services and Navigator Platform



Request a Quote

[Express Ordering](#)
 [Quotes \(1\)](#)
 [Shopping Cart \(0\)](#)

[Markets](#) > [Industrial](#) > [Anti-Corrosion/Rust](#) > [Pro 21](#) > [View Items](#)

Pro 21

[Printable Page](#)
[Download PDF](#)
[Email This Page](#)



PRO 21 Spray Lubricant™ is a Patented, (US Patent #5614478), aerosolized synthetic grease developed with advanced aerospace technology. Its unique, "Stay Where You Spray It", ability and trigger top dispenser makes it ideal for hard to get to applications. Light tan in color, Tasteless and Odorless, temperature range of - 80° F to +400° F. Resistant to water washout, contains anti-rust compounds. Will not dry out, gum on equipment, separate or bleed. Contains less than 30% VOC's, no CFC / HCFC [+ more](#)

1 - 1 of 1 | Results Per Page 25 | View 1

Request Information

| <u>Item #</u> | <u>Temperature Range</u> | <u>Low Temperature Torque @-65 °F. Starting</u> | <u>Low Temperature Torque @-65 °F. Running</u> | <u>List Price</u> | <u>Add To Cart/Request Quote</u> |
|---------------|--------------------------|---|--|-------------------|----------------------------------|
| | | | | | |

| | | | | | |
|----------------------|------------------------------------|--|---|---------------|--|
| 2074 | Temperature Range -80 to 400 °F | Low Temperature Torque @ -65 °F. Starting 1,534 gm-cm | Low Temperature Torque @ -65 °F. Running 649 gm-cm | \$7.47 | <input type="checkbox"/> Add To Cart <input type="checkbox"/> Request Quote |
|----------------------|------------------------------------|--|---|---------------|--|



All trademarks, trade names, or logos mentioned or displayed are the property of their respective owners, and are used only for technical or informational purposes.



Address

1600 Georgesville Road
Columbus, Ohio 43228

Contact

Toll-Free: 800.441.9160
Phone: 614.878.3600
Fax: 614.878.1600

Links

- [Privacy Policy](#)
- [Sitemap](#)
- [News & Events](#)

Aerospace Lubricants, Inc. has made every effort to properly capitalize, punctuate, identify and attribute trademarks and tradenames to their respective owners, including the use of ® and ™ (TM) wherever possible and practical

© 2018 Aerospace Lubricants, Inc., All Rights Reserved | Site created by Thomas Marketing Services and Navigator Platform



Request a Quote

[Express Ordering](#) [Quotes \(1\)](#) [Shopping Cart \(0\)](#)

[Markets](#) > [Food Grade](#) > [Tribolube-21HT](#) > [View Items](#)

Tribolube-21HT

[Printable Page](#) [Download PDF](#) [Email This Page](#)

Characteristics

Tribolube-21HT is the first H-1 true high performance, high temperature synthetic grease lubricant for use in Federally inspected meat and poultry plants. This H-1 grease will operate at temperatures as high as 450 °F for long periods of time with short excursions to 550 °F. NSF Registration No. 138881.

Applications

Tribolube-21HT is recommended for use in systems in baking operations, autoclaves, or extremely hot environments. It is also an excellent lubricant for ball, roller, [+ more](#)

1 - 1 of 1 | Results Per Page 25 | View 1

Request a Sample

| Item # | <u>Temperature</u> | <u>NLGI</u> | <u>Low Temperature Torque</u> | <u>Low Temperature Torque</u> | <u>List</u> | Ca |
|--------|--------------------|-------------|-------------------------------|-------------------------------|-------------|----|
|--------|--------------------|-------------|-------------------------------|-------------------------------|-------------|----|

| Range | No. | <u>@-65 °F. Starting</u> | <u>@-65 °F. Running</u> | Price | |
|-----------------------------|------------------------------------|------------------------------|---|--|--------|
| PC21HT-9715 | Temperature Range -65 to 550 °F | NLGI No. 1 | Low Temperature Torque @-65 °F. Starting 3,075 gm-cm | Low Temperature Torque @-65 °F. Running 761 gm-cm | \$8.38 |

1 - 1 of 1 | Results Per Page 25

| View  

1



All trademarks, trade names, or logos mentioned or displayed are the property of their respective owners, and are used only for technical or informational purposes.



Address

1600 Georgesville Road
Columbus, Ohio 43228

Contact

Toll-Free: 800.441.9160
Phone: 614.878.3600
Fax: 614.878.1600

Links

[Privacy Policy](#)

- [Sitemap](#)
- [News & Events](#)

Aerospace Lubricants, Inc. has made every effort to properly capitalize, punctuate, identify and attribute trademarks and tradenames to their respective owners, including the use of ® and ™ (TM) wherever possible and practical

© 2018 Aerospace Lubricants, Inc., All Rights Reserved | Site created by Thomas Marketing Services and Navigator Platform