

Evidence of Use in Commerce  
Exhibit 1

Mark: "VMP"

Registrant: Fulton Group N.A., Inc.



**Description:** Boilers bearing the "VMP" mark installed in a food processing facility.

Evidence of Use in Commerce  
Exhibit 2

Mark: "VMP"

Registrant: Fulton Group N.A., Inc.



**Description:** Boilers bearing the "VMP" mark installed in a hospital boiler room.

Evidence of Use in Commerce  
Exhibit 3

Mark: "VMP"

Registrant: Fulton Group N.A., Inc.


***Description:*** Point of sale printed brochure featuring boilers bearing the "VMP" mark manufactured by Fulton Steam Solutions, Inc., a commonly-owned manufacturing unit affiliate of Fulton Group N.A, Inc.



# VANTAGE™

GAS & GAS/OIL (DUAL-FUEL)  
CONDENSING BOILERS

2.0 – 6.0 MILLION BTU/HR

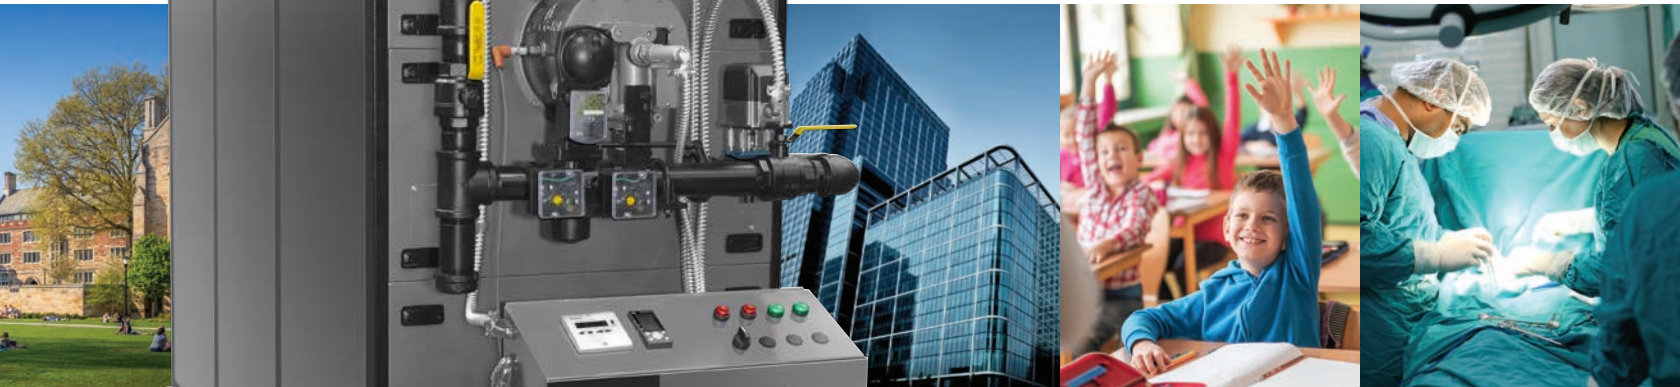

# HEAVY-DUTY ENGINEERING

Fulton's Vantage condensing boiler combines **proven industrial-grade firetube construction with modern condensing boiler efficiency**. Featuring a High-Mass and High-Volume pressure vessel, the Vantage provides exceptional tolerance for varying and sometimes unpredictable system conditions.

## DURABLE & DEPENDABLE


### DESIGNED FOR VARIABLE PRIMARY FLOW

This simplified piping method enhances temperature control, reduces design complexity, and maximizes efficiencies by delivering the lowest temperature water directly to the boiler with no blending.

### DUAL-FUEL OPERATION WITH #2 OIL

For critical heating processes requiring redundancy in the event of a fuel disruption, Vantage boilers can be configured for dual-fuel operation.

### LIFETIME THERMAL SHOCK WARRANTY

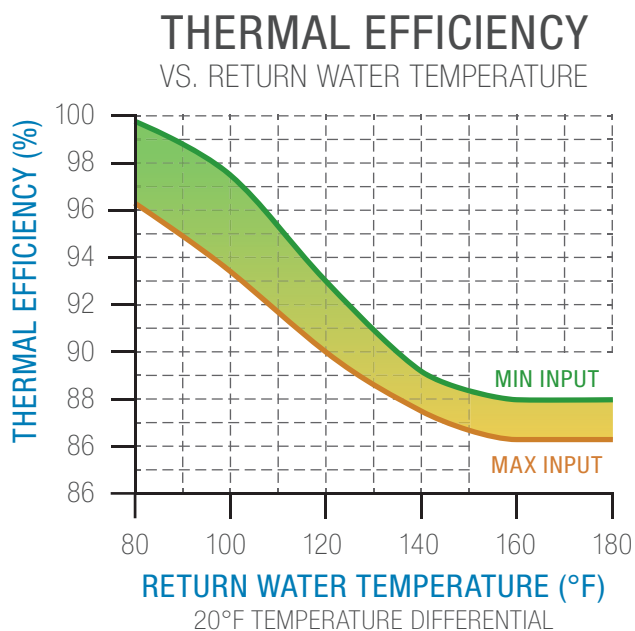

▲ A healthcare facility in Wisconsin utilizes three Vantage 3.0 MM BTU/hr boilers for multiple heating applications

## MODULAR BOILER SEQUENCING

The optional touchscreen ModSync boiler sequencing panel integrates multiple Vantage boilers into a cohesive system. This provides centralized intuitive monitoring of the entire boiler plant.

### BEST EFFICIENCY PERFORMANCE

Highly optimized control matches boiler output to system load, thereby minimizing boiler cycling and extending equipment life.

### BUILDING INTEGRATION

Modbus; BACnet configurable

## SIGNIFICANT ENERGY SAVINGS

### PRECISION COMBUSTION SYSTEM


Vantage boilers feature linkageless air and gas servo motors for unsurpassed repeatability.

### CONSISTENT EFFICIENCY

Reliable performance throughout varying environmental conditions and heating demands.

# OPTIMIZED ARCHITECTURE

- ▶ **INDUSTRIAL DURABILITY:** The fully wetted furnace chamber and large passageways keep stresses low and allow for full input without flame impingement on gas or #2 fuel oil.
- ▶ **ADVANCED MATERIALS:** **The Duplex Alloy Stainless Steel heat exchanger** features superior strength, lower stresses, and improved corrosion resistance over conventional 316L and 439 grades used by competitors.
- ▶ **ROBUST PRESSURE VESSEL:** Precision robotics and ASME-certified welders perform the impressive workmanship that goes into the Vantage pressure vessel. It's engineered for unsurpassed durability in high demand commercial and industrial applications; **a zero-flow condition will not harm the boiler.**

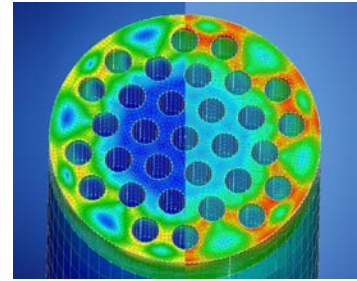

**Finite Element Analysis (FEA)**  
*Duplex Stainless Steel (left) features 19% greater strength and a 23% reduction in thermal expansion compared to 316L (right)*



# DUAL-FUEL PEACE OF MIND

## FUEL VARIETY AND FLEXIBILITY

Vantage boilers include packaged power burners that can be configured for a wide variety of fuels.

- ▼ NATURAL GAS and #2 FUEL OIL
- ▼ PROPANE and #2 FUEL OIL
- ▼ NATURAL GAS and PROPANE

## SIMPLIFIED OPERATION

With automatic fuel switchover capabilities, changing fuels is as easy as flipping a switch.

- ▼ FULL BTU/HR INPUT ON BOTH FUELS
- ▼ DIRECT SPARK OIL IGNITION
- ▼ NO GAS PILOT REQUIRED ON OIL
- ▼ DOES NOT REQUIRE COMPRESSED AIR

## FULL-TIME FUEL OIL BOILER

- ▼ **ULTRA-HIGH EFFICIENCY**  
Condensing operation on gas and <15 ppm sulfur #2 oil; non-condensing on standard #2 oil.
- ▼ **FUEL CURTAILMENT APPLICATIONS**  
Customers may qualify for lower natural gas rates with the ability to operate on a second fuel.

### PROPANE

*Tanks must be installed outdoors with minimum clearance requirements to surrounding buildings.*

### #2 FUEL OIL

*Can be stored indoors; already available in many buildings from prior installations or in facilities with backup generators.*


- ▼ *An Indiana Hospital relies on three Vantage (VTG-2000DF) dual-fuel boilers to provide uninterrupted service*



# SPECIFICATIONS AT A GLANCE

| MODEL:                      |     | VTG   | 2000  | 2000DF | 3000  | 3000DF | 4000  | 4000DF | 5000  | 5000DF | 6000   | 6000DF |
|-----------------------------|-----|-------|-------|--------|-------|--------|-------|--------|-------|--------|--------|--------|
| <b>SPECIFICATIONS</b>       |     |       |       |        |       |        |       |        |       |        |        |        |
| Input Capacity              | MBH | 2000  | 2000  | 3000   | 3000  | 4000   | 4000  | 5000   | 5000  | 6000   | 6000   | 6000   |
| AHRI Thermal Efficiency     | %   | 95.7  | 95.7  | 96.3   | 96.3  | 96.9   | 96.9  | 92.6   | 92.6  | 94.0   | 94.0   | 94.0   |
| Water Content               | GAL | 147   | 147   | 215    | 215   | 275    | 275   | 275    | 275   | 480    | 480    | 480    |
| Pressure Drop at 20°F ΔT    | PSI | 0.9   | 0.9   | 1.0    | 1.0   | 2.8    | 2.8   | 4.8    | 4.8   | 5.5    | 5.5    | 5.5    |
| Operating Weight            | LB  | 5,100 | 5,100 | 7,100  | 7,100 | 8,900  | 8,900 | 9,200  | 9,200 | 14,800 | 14,800 | 14,800 |
| Electrical Req. at 460/3/60 | FLA | 5     | 7     | 7      | 8     | 10     | 8     | 13     | 15    | 13     | 15     | 15     |
| Electrical Req. at 230/3/60 | FLA | 10    | 14    | 14     | 16    | 19     | 16    | 26     | 30    | 26     | 30     | 30     |
| Electrical Req. at 208/3/60 | FLA | 13    | 16    | 16     | 19    | 22     | 19    | 29     | 34    | 29     | 34     | 34     |
| <b>DIMENSIONS</b>           |     |       |       |        |       |        |       |        |       |        |        |        |
| (A) Height                  | IN  | 76.2  | 64.2  | 86.9   | 86.9  | 89.2   | 77.9  | 99.2   | 77.9  | 88.9   | 88.9   | 88.9   |
| (B) Height w/o Blower       | IN  | 64.2  | 64.2  | 72.3   | 72.3  | 77.9   | 77.9  | 77.9   | 77.9  | 88.9   | 88.9   | 88.9   |
| (C) Width                   | IN  | 30.5  | 30.5  | 34.5   | 34.5  | 40.5   | 40.5  | 40.5   | 40.5  | 50.5   | 50.5   | 50.5   |
| (D) Depth                   | IN  | 108   | 122   | 120    | 132   | 124    | 136   | 136    | 142   | 155    | 155    | 155    |
| <b>MINIMUM CLEARANCES</b>   |     |       |       |        |       |        |       |        |       |        |        |        |
| (E) Sides                   | IN  | 1     | 1     | 1      | 1     | 1      | 1     | 8      | 1     | 1      | 1      | 1      |
| (F) Front                   | IN  | 36    | 36    | 36     | 36    | 36     | 36    | 36     | 36    | 36     | 36     | 36     |
| (G) Top                     | IN  | 24    | 24    | 24     | 24    | 24     | 24    | 24     | 24    | 24     | 24     | 24     |
| (H) Rear                    | IN  | 24    | 24    | 24     | 24    | 24     | 24    | 24     | 24    | 24     | 24     | 24     |

NOTE: Specifications and dimensions are approximate and for reference purposes only. Fulton reserves the right to change specifications and/or dimensions without notice. Graphics contained in this brochure may not be representative of actual product.

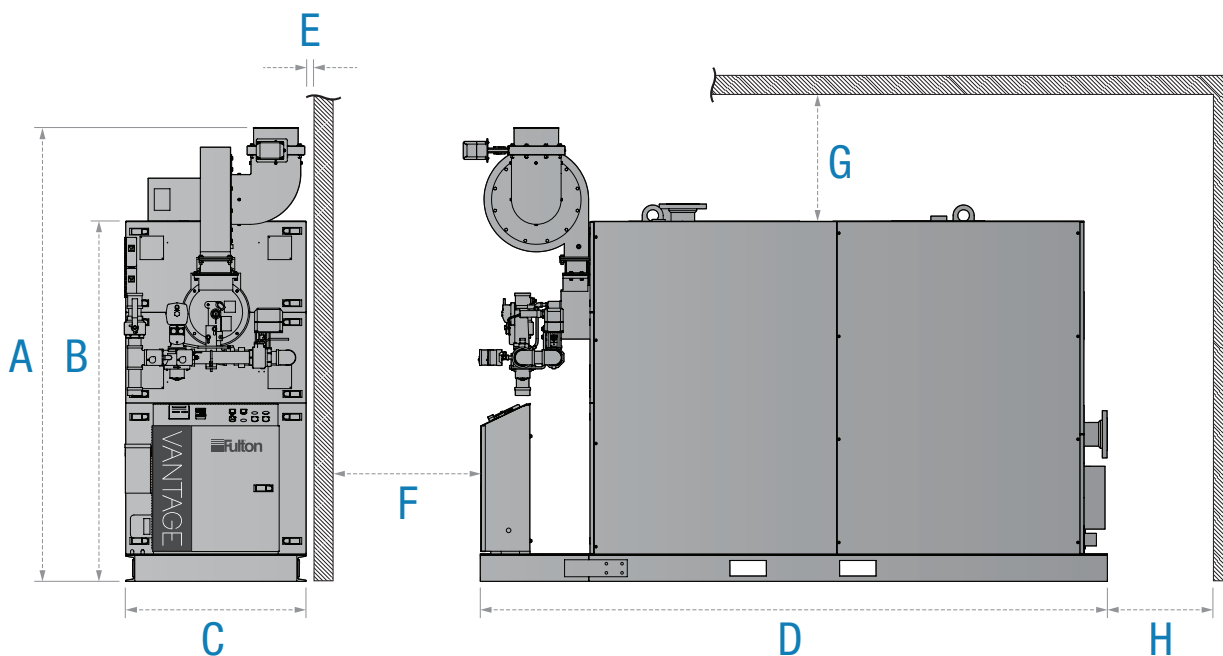



# SIMPLIFY YOUR HEATING SYSTEM

Vantage boilers are available through a worldwide network of authorized Fulton representatives. Your local representative can assist you in the selection of Fulton equipment to best meet your application needs.



Find your local sales representative online at:

[www.fulton.com/sales](http://www.fulton.com/sales)




/FULTON-COMPANIES



/FULTONBOILER



@FULTONBOILER



Fulton Heating Solutions, Inc.  
6288 Running Ridge Road  
Syracuse, NY 13212  
(315) 298-8510

Printed in the U.S.A.  
VANTAGE\_BRO\_2018-1004

Learn more about  
Fulton products and  
services online at:  
[www.fulton.com](http://www.fulton.com)