



# SpanFast™ Drywall Grid System

## Applications

Condos, hotels, motels, suites, dorms, apartments, rest rooms, town homes, multi-housing and closets.

## Features

- Heavy Duty construction increases strength and decreases roll-over during installation.
  - Hanger wires are eliminated in many applications, and are reduced vs. standard drywall grid at spans greater than 7', minimizing labor and material costs.
  - Suspension components have knurled surfaces to easily accept screws.
  - Suspension components are bundled in convenient quantities - no cartons.
  - Wall Track's heavy duty construction increases strength and decreases roll-over for easy installation.
  - Wall Track pre-set modules 8" O.C. allow contractors to "pull tape" once and install quickly
- ## Benefits
- Minimum 25% post consumer recycled content, 100% locally recyclable, global/regional manufacture.

## Product


### Material:

A. General  
 ASTM C 635 Heavy Duty (HD) furring runner classification; commercial quality 0.20 steel, hot-dip galvanized body and knurled face cap, 1-3/8" width, 1-1/2" height.


### Components:

- Furring Runner:**
  - 640.SF.96 (96", hanger holes 5" OC, HD)
  - 640.SF.120 (120", hanger holes 5" OC, HD)
  - 640.SF.144 (144", hanger holes 5" OC, HD)
  - 640.SF.168 (168", hanger holes 5" OC, HD)
- Wall Track:**  1450.00SF (144", 3/4" x 1-9/16" x 1")
- Accessories:**
  - Variable Placement Clip:
  - VPCLIP.10 (10 clips per ctn)
  - VPCLIP.100 (100 clips per ctn)


### Furring Runner



### Wall Track



### Variable Placement Clip

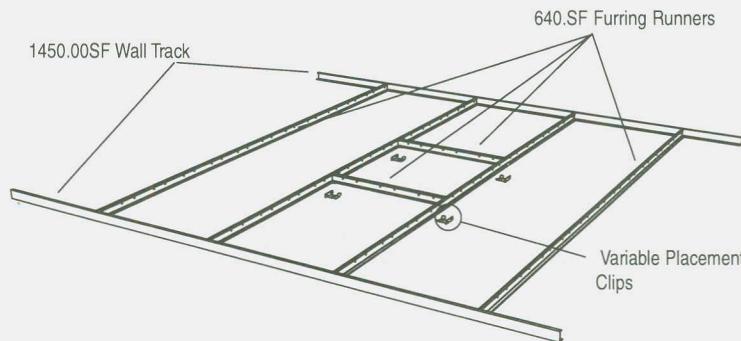


**Installation Notes:**

1. Load test data shows uniform load in lbs/LF based on simple span tests in accordance with ASTM deflection limit on L/240.
2. Attachment of Wall Track 1450.00SF to wall structure is critical. Connection to withstand 100 lb. in shear and pull-out.



## SpanFast™ Drywall Grid System

### Component Load Test Data

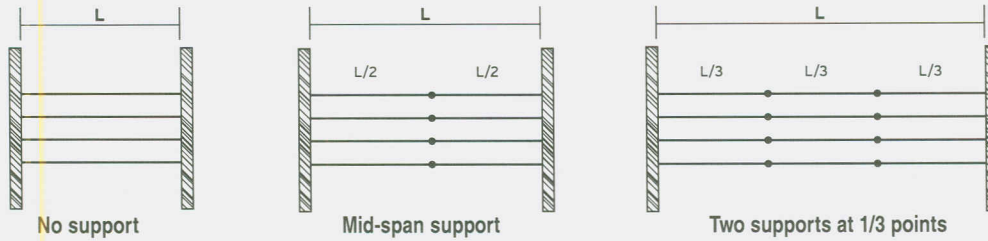

			Allowable Load (lb/ft <sup>2</sup> ) With No Lateral Bracing at L/240 (per ASTM C 645)									
			Span									
Number	Length	Spacing	No Support				Mid-span Support					Two Supports at 1/3 Points
			4'	5'	6'	7'	7'	8'	10'	12'	14'	14'
640SF.096	8'	16"	18.80					18.80				
640SF.096	8'	24"	12.50					12.50				
640SF.120	10'	16"		10.23					10.23			
640SF.120	10'	24"		6.80					6.80			
640SF.120	12'	16"			6.05					6.05		
640SF.120	12'	24"			4.03					4.03		
640SF.168	14'	16"				3.86					3.86	
640SF.168	14'	16"					28.57					12.23
640SF.168	14'	24"					19.00					8.14



Ceiling Systems and Specialty Products - USA and Canada: 800.323.7164 / Fax: 800.222.3744 / [chicagometallic.com](http://chicagometallic.com)  
 CHICAGO / BALTIMORE / LOS ANGELES / BELGIUM / DENMARK / UK / GERMANY / FRANCE / HONG KONG / PRC / MALAYSIA / UNITED ARAB EMIRATES / MEXICO

Chicago Metallic and its logo are Registered Trademarks of Chicago Metallic Corporation. SpanFast is a trademark of Chicago Metallic Corporation.  
 © 2007 Chicago Metallic Corporation All Rights Reserved G-SUB-Span-0307 Printed in USA