




Temporary Equipment, Lifetime Customers.



# Temporary Industrial & Construction Heating







Call Toll-Free 24 Hours a Day

**800.892.8677 • etopp.com**

## Put our People, Equipment and Experience to Work for You

In 1991, TOPP Portable Air was established on the principle of providing customers with custom tailored temporary and emergency heating, cooling and dehumidification solutions. We are available whenever and wherever you need it; twenty-four hours a day, nationwide.

Our portable heating units provide a wide range of heating options from custom designed gas fired heaters to free-blowing and ductable electric heaters to serve all your heating needs.

Our equipment can also be used to help restore fire, flood and mold & mildew damaged buildings, quickly and efficiently.

### We provide turn-key 24/7 service and support including:

- Project sizing
- Equipment location planning
- Equipment delivery
- Installation
- Teardown and removal

Our highly trained and experienced team, combined with our immense inventory and wide variety of equipment and logistics capabilities, earn us lifetime customers.

## Temporary Heating Equipment

### Safe-Heat Direct Fired Heaters

An extensive fleet of custom-designed, make-up air and recirculating gas fired heaters ranging from 150,000 to 4,000,000 BTU/hr. These heaters are designed for indoor and outdoor use. Fuel choices include vapor or liquid propane and low/high pressure natural gas. Our direct fired gas heaters exceed government and OSHA standards.

### Safe-Heat Indirect Fired Heaters


TOPP's indirect fired heaters provide clean, dry heated air free of combustion by-products and moisture. Models range from 420,000 to 2,000,000 BTU/hr and can be ducted up to 200 feet. Fuel choices include fuel oil, propane or natural gas. The units run in recirculating or make-up air mode.

### Safe-Heat Electric Heaters

A complete line of moisture free, recirculating and ductable electric heaters are available in sizes from 15kW, 30kW, and 60kW.




Order

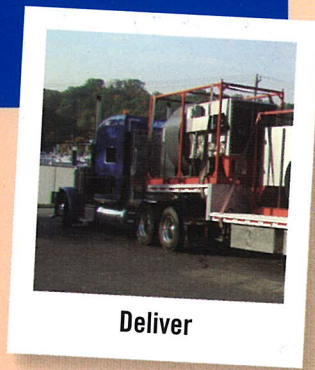

Deliver



Install

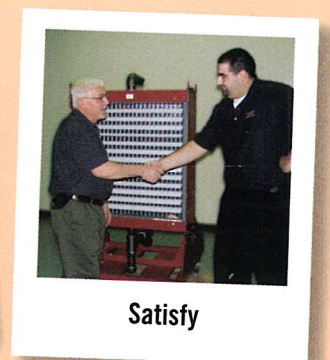








Satisfy









# Temporary Industrial & Construction Heating









## Safe-Heat®

Direct-Fired Temporary Heaters	 SH-150	 SH-350	 SH-500	 SH-1000	 SH-2500	 SH-2000	 SH-4000
Heating Capacity BTU/h	150,000	175,000 - 350,000	100,000 - 500,000	400,000 - 1,000,000	750,000 - 2,000,000	400,000 - 2,000,000	1,750,000 - 4,000,000
CFM	450	1500	4,600	5,250	10,000	10,750	22,250
Fuel Type	Propane/NG	Propane	Propane/NG	Propane/NG	Propane/NG	Propane/NG	Propane/NG
Power Supply	120V, 6.5 amps, 1ph	120V, 4.2 amps, 1ph	120V, 7 amps, 1ph	120V, 13 amps, 1ph	208/230V, 12.2/11 amps, 1ph	208/230V, 28/25 amps, 1ph	230/460V, 40/20 amps, 3ph
Net Weight/Shipping Weight	24/29 lbs	42/51 lbs	135/170 lbs	195/230 lbs	250/330 lbs	1300/1300 lbs	1500/1500 lbs
Dimensions, WxDxH	13 x 26 x 9 in	20 x 34 x 13 in	30 x 42 x 24 in	33 x 48 x 25 in	37 x 58 x 29 in	60 x 110 x 48 in	88 x 133 x 65 in
Certification	AGA	AGA	CSA/AGA	CSA/AGA	CSA Pending	CSA/AGA	CSA/AGA

All specifications are subject to change without notice. NG = Natural Gas

Indirect-Fired Temporary Heaters	 OHV 500-O	 OHV 500-PN	 IDF-500	 IMAC-2000S-O	 IMAC-2000S-PN	 IDF-2000
Heating Capacity BTU/h	420,000	450,000	500,000	631,000	631,000	2,000,000
CFM	3,100	3,100	4,100	6,500	6,500	12,500
Fuel Type	Fuel Oil	Propane/NG	Fuel Oil	Fuel Oil	Propane/NG	Fuel Oil
Power Supply	120V, 15 amps, 1ph	120V, 15 amps, 1ph	230V, 13 amps, 1ph	208V, 13 amps, 3ph	208V, 13 amps, 3ph	208/240/480V, 23/20/10 amps, 3ph
Net Weight/Shipping Weight	400/510 lbs	400/510 lbs	1000/1080 lbs	1235/1350 lbs	1235/1650 lbs	3400/3480 lbs
Dimensions, WxDxH	50 x 70 x 35 in	50 x 70 x 35 in	49 x 96 x 47 in	54 x 94.5 x 32 in	54 x 94.5 x 32 in	78 x 161 x 65 in
Certification	CSA	ETL	CSA Burner	CSA/AGA	CSA/AGA	CSA Burner

All specifications are subject to change without notice. NG = Natural Gas

Electric & Steam Heaters/Fans	 SM-51	 SM-102	 CEH-204	 STM-500	 HP Fan	 SF-10
Heating Capacity BTU/h	51,195	102,390	204,720	684,000	n/a	n/a
CFM	800	800	1,100 - 2,700	4,000	6,000	10,900
Fuel Type	Electric	Electric	Electric	Steam	Electric	Electric
Power Supply	208/240/480V, 42/36/18 amps, 3ph	480V, 36 amps, 3ph	480V, 74 amps, 3ph	120V, 1ph	230V, 23 amps, 1ph	115V, 6.4 amps, 1ph
Net Weight/Shipping Weight	50/65 lbs	60/95 lbs	170/425 lbs	225/400 lbs	250/330 lbs	65/100 lbs
Dimensions, WxDxH	41 x 24 x 36 in	41 x 28 x 36 in	34 x 46 x 36 in	66 x 34 x 36 in	39 x 36 x 28 in	38 x 38 x 17 in
Certification	UL Listed	UL Listed	UL Components	CSA	ETL	n/a

All specifications are subject to change without notice.