








GLOBAL FINISHING SOLUTIONS

**PYRAMID™**

## Affordable Crossdraft Spray Booths

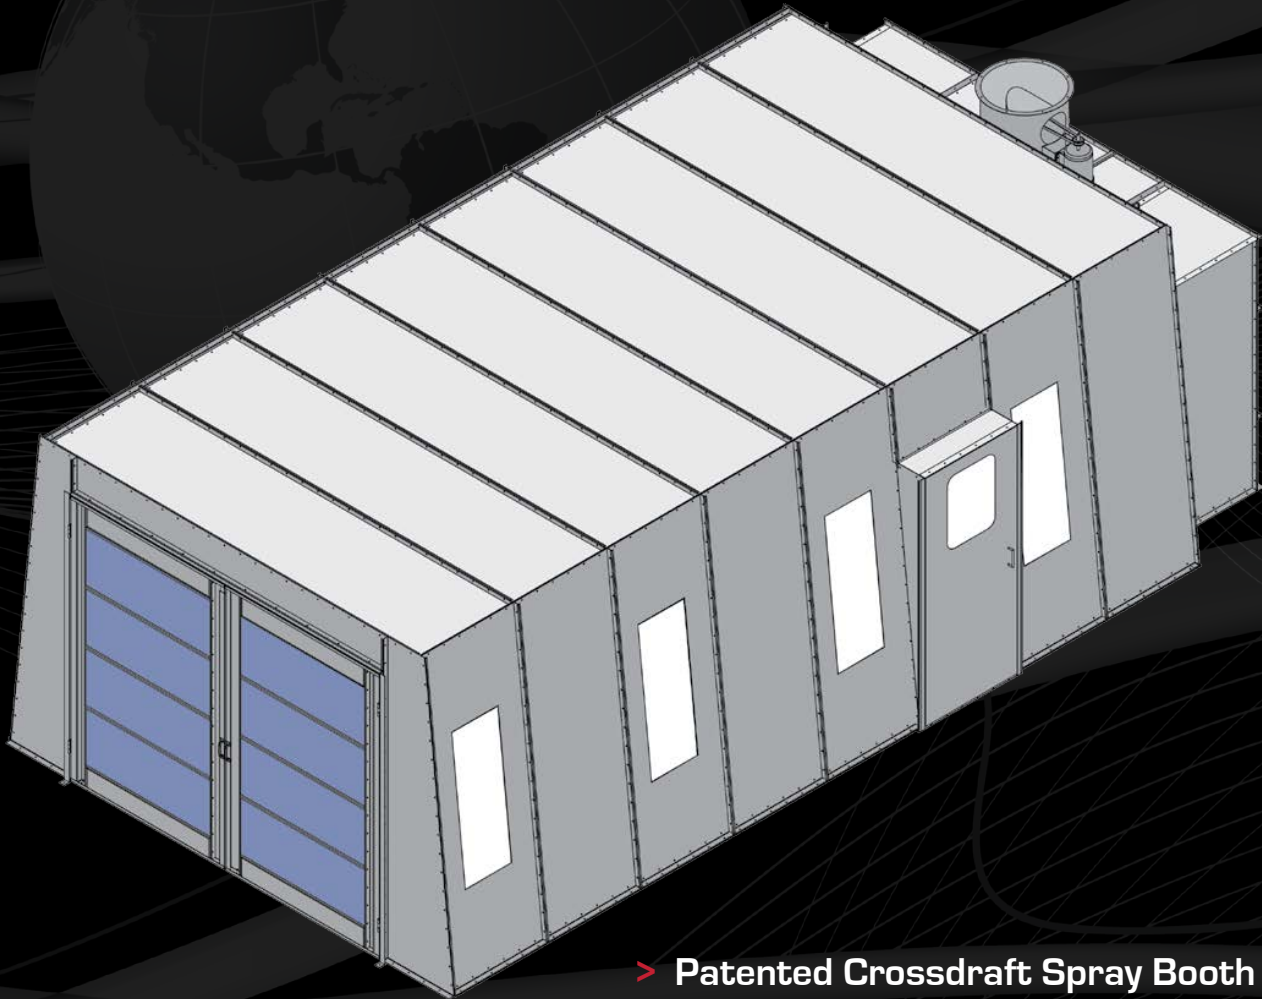

- > Patented Crossdraft Spray Booth Design
- > Low Operating Cost
- > Competitively Priced
- > Unique and Proven Panel Design
- > Easy to Assemble

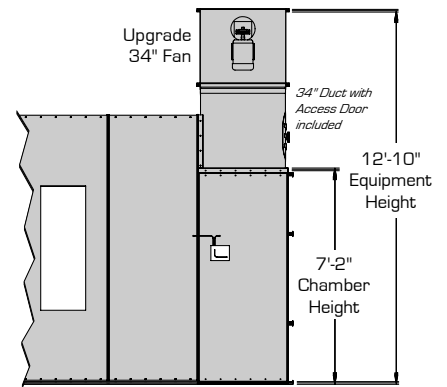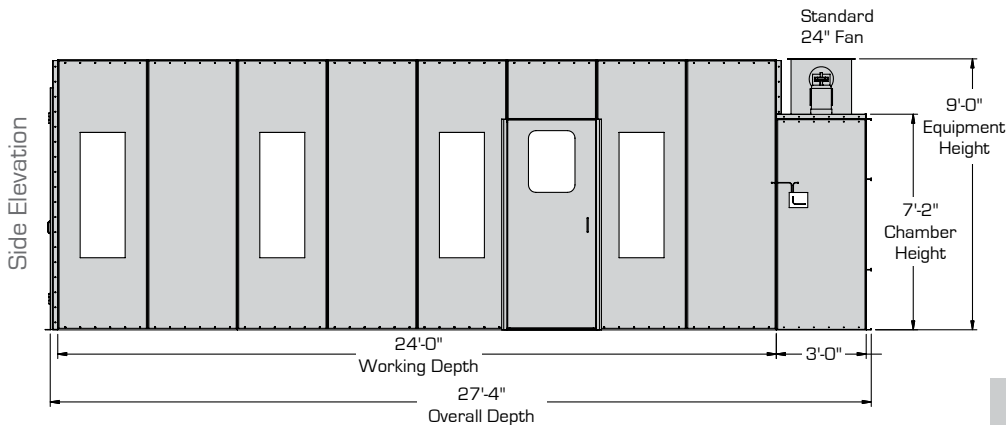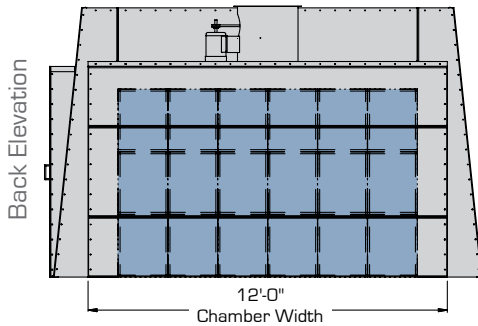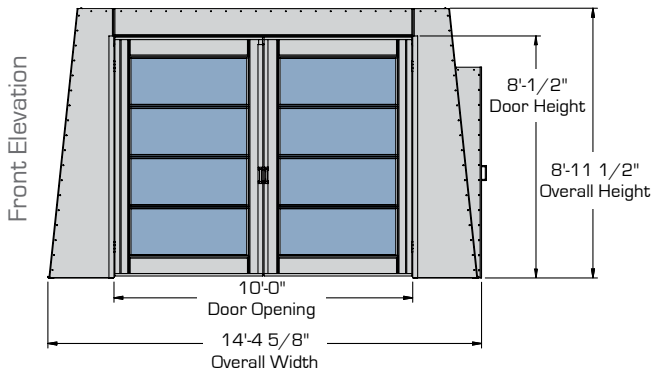

**PYRAMID™ Specifications:**

- > Horizontal spray booth airflow during operation
- > Single skin panel construction
- > Galvanized steel
- > Filtered swing entrance doors
- > Solid back exhaust chamber
- > High-efficiency intake and exhaust filtration
- > (1) exhaust fan and motor
- > Inside-accessible, 4-tube light fixtures, ETL listed, Class 1 Division 2 (includes color corrected T-8 fluorescent tubes)
- > Side access door with observation window (1) per standard cabin

Pyramid Booths	Flow Rate		Fan Diameter	Motor HP	Fixture Quantity
	SCFM	Velocity			
Standard	8,550	75 FPM	24"	3	8
Upgrade	11,400	100 FPM	34"	5	10

**Notes:**

1. GFS recommends proper air replacement system. Contact GFS if air replacement is needed.
2. GFS industrial booths are intended for indoor installation only.
3. Air solenoid valve required for all installations for fan interlock, priced separately.
4. All specifications are subject to change without prior notice.

Consult your authorized GFS distributor for details of required installation, electrical wiring, conduit, air piping, automatic fire suppression and roof penetrations. Equipment installation location should be reviewed and approved by the local authorities having jurisdiction.

**Optional Equipment (upgrades)**

- > Electrical control panel
- > Pressure balancing packages
- > Air replacement system (Provides ambient or tempered air to replace air booth withdraws from facility)
- > Ductwork