


# DAYTONA LIGHTS™

BY *Metra*   
THE INSTALLER'S CHOICE

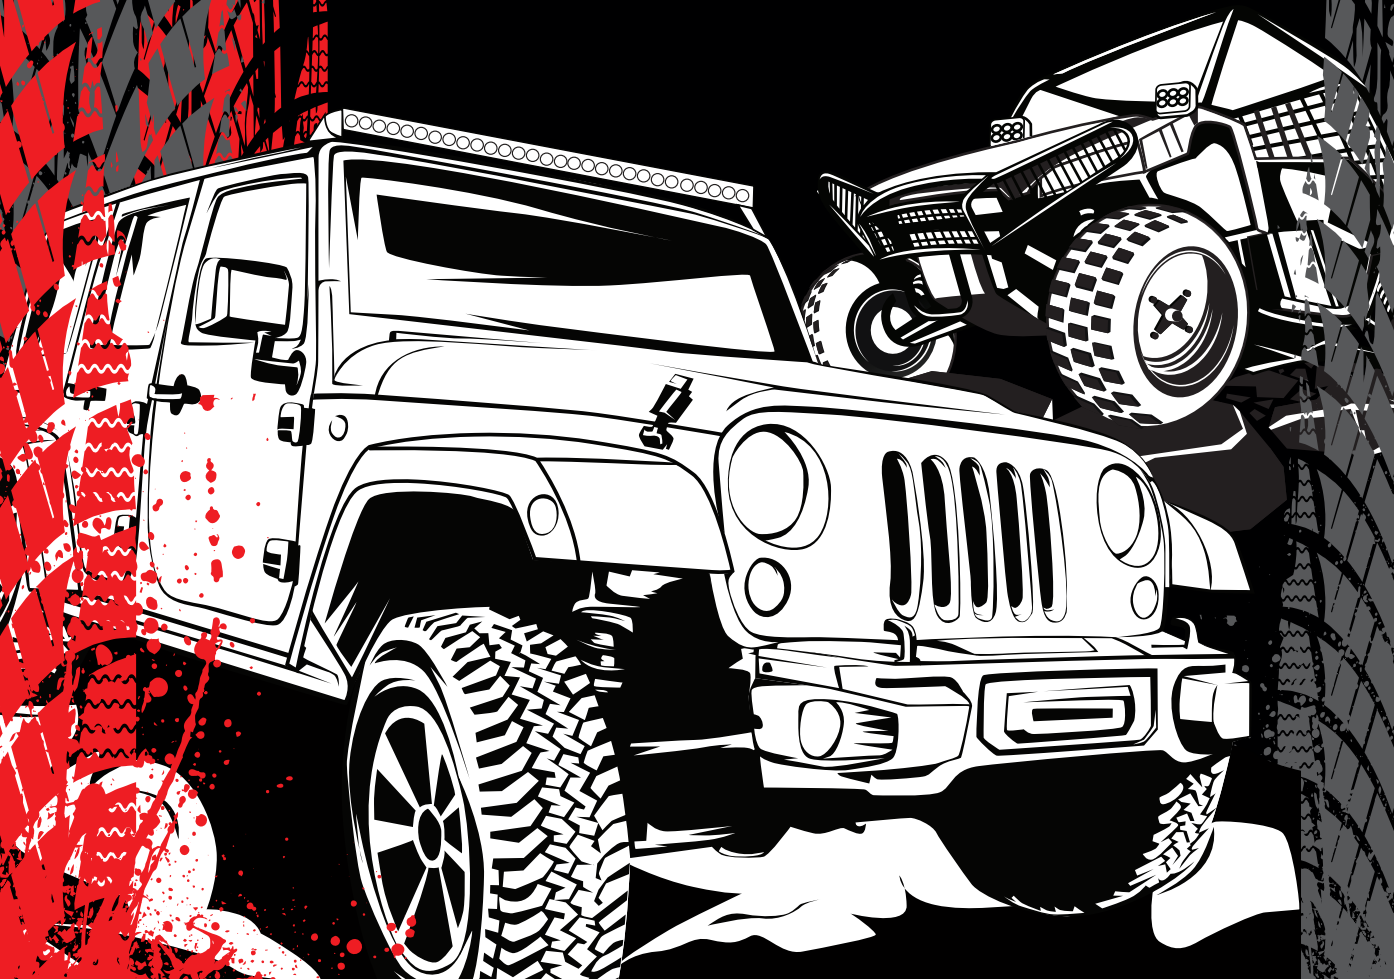

# MANUFACTURED EXCLUSIVELY

BY METRA ELECTRONICS

The new Daytona Lights™ series is engineered and manufactured to meet all international standards while providing incredible value for vehicle owners. This new product line of aftermarket automotive lighting includes headlight replacement bulbs and decoders, dual-row and ultra-slim LED lightbars, and cube-style LED lights at an affordable price.

Advanced thermal management, short circuit and open circuit protection and many other innovative features repel moisture and extend the overall life of the product. All of these lights are rated IP67 and undergo rigorous testing during the development and manufacturing process and once again before leaving the factory. Metra's 70+ year history, experience and approach to engineering and manufacturing ensures that all of these products stand out among the competitors and provide both quality and value.



Auxiliary driving and fog lights are intended for use solely as auxiliary lighting. They are not intended to be used for headlight purposes, nor are they certified for headlight usage. Auxiliary lights are designed

to improve visibility during night time driving and inclement weather. Irresponsible use of any auxiliary light can be dangerous and illegal. Auxiliary driving lights are intended to supplement the high-beam of a standard headlamp system. They are not intended for use alone or with the low-beam of a standard headlamp system. Lighting laws vary from state to state.



**WARNING:** This catalog does not advise whether a State of California Proposition 65 warning is required for a particular item of merchandise. To learn whether a particular item of merchandise requires a California Proposition 65 warning, please be sure to look up and read the particular merchandise's listing on Metra's website [www.MetraOnline.com](http://www.MetraOnline.com), as well as read the particular merchandise's packaging. When a California Proposition 65 warning is present on Metra's website listing for the particular merchandise, or on the particular merchandise's packaging, a compliant California Proposition 65 warning is to be provided to the purchasing California consumer prior to the sale of the particular merchandise.


**DL-US725** **7.25** INCH **6** LED

**Wattage:** 18W • **Raw Lumens:** 1080lm  
**Current Consumption @13.8V:** 1.3A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)




**DL-US135** **13.5** INCH **12** LED

**Wattage:** 36W • **Raw Lumens:** 2160lm  
**Current Consumption @13.8V:** 2.6A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)



**DL-US195** **19.5** INCH **18** LED

**Wattage:** 54W • **Raw Lumens:** 3240lm  
**Current Consumption @13.8V:** 3.9A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)



**DL-US32** **32** INCH **30** LED

**Wattage:** 90W • **Raw Lumens:** 5400lm  
**Current Consumption @13.8V:** 6.5A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)



**DL-US4425** **44.25** INCH **42** LED

**Wattage:** 126W • **Raw Lumens:** 7560lm  
**Current Consumption @13.8V:** 9.2A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)



**DL-US5025** **50.25** INCH **48** LED

**Wattage:** 144W • **Raw Lumens:** 8640lm  
**Current Consumption @13.8V:** 10.5A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Spot 8° • **Bar Dimensions:** 1.75"D x 1.0625"H (bar only)



**COMMON FEATURES**

**Housing Material:** Die-cast aluminum • **Color:** Black  
**Lens Material:** Polycarbonate • **Hardware:** Stainless steel  
**Electronics:** Integrated-epoxy encapsulated  
**Operating Temperature:** -40° F to 140° F • **Protection:** Reverse polarity

# LIGHTBARS • DUAL<sup>ROW</sup>

**DL-DR8**

**8** INCH

**12** LED

**Wattage:** 36W • **Raw Lumens:** 2160lm  
**Current Consumption @13.8V:** 2.6A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (*bar only*)



**DL-DR14**

**14** INCH

**24** LED

**Wattage:** 72W • **Raw Lumens:** 4320lm  
**Current Consumption @13.8V:** 5.2A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (*bar only*)



**DL-DR22**

**22** INCH

**40** LED

**Wattage:** 120W • **Raw Lumens:** 7200lm  
**Current Consumption @13.8V:** 8.7A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (*bar only*)



**DL-DR32**

**32** INCH

**60** LED

**Wattage:** 180W • **Raw Lumens:** 10800lm  
**Current Consumption @13.8V:** 13.1A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (*bar only*)



## COMMON FEATURES

**Housing Material:** Die-cast aluminum • **Color:** Black • **Membrane:** Military breather  
**Lens Material:** Polycarbonate • **Hardware:** Stainless steel  
**Electronics:** Integrated-epoxy encapsulated  
**Operating Temperature:** -40° F to 140° F • **Protection:** Reverse polarity

**DL-DR42**    **42** INCH    **80** LED

**Wattage:** 240W • **Raw Lumens:** 14400lm  
**Current Consumption @13.8V:** 17.4A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (bar only)



**DL-DR50**    **50** INCH    **96** LED

**Wattage:** 288W • **Raw Lumens:** 17280lm  
**Current Consumption @13.8V:** 20.9A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (bar only)



**DL-DR52**    **52** INCH    **100** LED

**Wattage:** 300W • **Raw Lumens:** 18000lm  
**Current Consumption @13.8V:** 21.8A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Combo - Flood 90° & Spot 8°  
**Bar Dimensions:** 3.4375"D x 3.0625"H (bar only)



**Housing Material:** Die-cast aluminum • **Color:** Black • **Membrane:** Military breather  
**Lens Material:** Polycarbonate • **Hardware:** Stainless steel  
**Electronics:** Integrated-epoxy encapsulated  
**Operating Temperature:** -40° F to 140° F • **Protection:** Reverse polarity

**COMMON  
FEATURES**

**DL-CL1**    **4** INCH    **6** LED

**Wattage\*:** 36W • **Raw Lumens\*:** 2520lm  
**Current Consumption\* @13.8V:** 2.6A • **IP Rating:** IP67  
**Input Voltage:** 10-30V DC • **Color Temperature:** 6000K  
**Beam Pattern:** Flood 90°  
**Cube Dimensions:** 2.75"D x 4"H (including bracket)

**Housing Material:** Die-cast aluminum • **Color:** Black  
**Lens Material:** Polycarbonate • **Hardware:** Stainless steel  
**Electronics:** Integrated-epoxy encapsulated

**Operating Temperature:** -40° F to 140° F  
**Protection:** Reverse polarity

\*Total value for set of two lights



# REPLACEMENT LED • HEADLIGHT *BULBS*



**PAIR**

**40** WATTS

**SINGLE-BEAM**

**DUAL-BEAM**

**Wattage:** 20W per bulb  
**Total Length:** 3.1" (78.2mm)  
**Heat Sink:** 1.26" (32mm) diameter  
**IP Rating:** IP67  
**Output:** 6000lm\*  
**Color Temperature:** 6500K  
**Good For:** Tight applications  
**Operating Temperature:** -40° F to 176° F  
 \* lumen rating for pair

DL-H1	DL-H11	DL-9006	DL-H4	DL-9004
DL-H3	DL-H16	DL-9012	DL-H13	DL-9007
DL-H7	DL-5202	DL-PSX24		
DL-H8	DL-880	DL-PSX26		
DL-H9	DL-881	DL-P13		
DL-H10	DL-9005			

## CANBUS DECODERS



**PACKAGED PAIR**

**SINGLE-BEAM**

**DUAL-BEAM**

**Use With:** Vehicles that have CANBUS systems that monitor the headlights  
**Stops:** The headlights from flashing  
**Simple:** Plug-n-play connections

DL-H1D	DL-H11D	DL-9006D	DL-H4D	DL-9004D
DL-H3D	DL-H16D	DL-9012D	DL-H13D	DL-9007D
DL-H7D	DL-5202D	DL-PSX24D		
DL-H8D	DL-880D	DL-PSX26D		
DL-H9D	DL-881D	DL-P13D		
DL-H10D	DL-9005D			

# TERMS & CONDITIONS

## TERMS

Net 30 days from date of invoice on approved accounts. Minimum order: \$50 per invoice, orders less than required minimum incur a \$20 service charge.

## FREIGHT

Freight on board (F.O.B.) from point of shipment. Freight will be charged on all drop-shipment orders.

## CREDIT

In order to establish a credit line with Metra, an application for credit must be submitted listing a minimum of five (5) trade references and a bank with their addresses and phone numbers and must be signed by a principal or authorized officer of the company. A credit line will be established by our credit manager and must be maintained in a current status according to our terms (net 30 days). Credit not established or revoked requires remittance with order. Returned checks are subject to a fee of \$32.00.

## RESALE TAX EXEMPTION CERTIFICATE

CA, TX, KY, NJ & FL customers must provide a valid resale card before an order can be placed.

## CLAIMS

Title and risk of loss passes to buyer at F.O.B. shipping point and all claims must be filed with carrier. Any discrepancies must be reported to Metra within ten (10) days of receipt of shipment.

## RETURNS

All sales are final. No returns or exchanges will be allowed without prior written authorization from Metra. All returns are subject to a 20% handling charge, must be in a salable condition and must have been purchased within sixty (60) days of return request. No stock balancing permitted. Copies of invoices must be mailed in advance for any return authorization (R.A.).

## LIMITED WARRANTY

***Metra warrants all of its products to be free from defects in material and workmanship for a period of 1 Year from date of shipment.*** Metra will, at its option, repair, replace, or allow credit on any part which, in Metra's opinion, is found defective under normal use. Warranty void on any items misused, altered in any way, tampered with or serviced by anyone other than Metra Electronics. This warranty of merchantability of fitness neither assumes or authorizes any other person to assume for it, any other liability in connection with its products. In no event shall we be liable for any incidental or consequential damages, or do we assume any other liability for any incidental or consequential damages, or do we assume any other liability except provided herein.

*Metra Electronics® warrants this products only to the original purchaser.*

## BACK ORDERS

If an item is temporarily unavailable for immediate shipment, we will back-order the item & ship as soon as possible from the nearest available warehouse, unless otherwise instructed. Metra reserves the right to make changes in or deletions of products or prices without prior notice.

\*Metra will not assume any responsibility for damages to person or property due to incorrect interpretation of the material in this publication. Metra is not responsible for typographical or printing errors. Reproductions of editorial or pictorial content is strictly prohibited without prior consent from Metra.

**CORPORATE HEADQUARTERS**

Metra Electronics Corporation  
460 Walker Street  
Holly Hill, FL 32117-2699

Metra Corporate: 386.257.1186  
Metra 12volt & International Sales: 386.257.2956  
Sales Fax: 386.258.3940

**WAREHOUSE OPERATIONS**

Daytona Beach, FL  
Dallas, TX  
Freehold, NJ  
Lexington, KY  
Fresno, CA  
Long Beach, CA

**OVERSEAS OPERATIONS**

Taipei, Taiwan R.O.C. • Hong Kong



**DAY-LIGHT19**



©2020 Metra Electronics Corp.



facebook.com  
/MetraElectronics



twitter.com  
/MetraElectronic



youtube.com  
/MetraElectronics



instagram.com  
/MetraElectronics



Order Anytime Day or Night  
at MetraDealer.com



Download Catalogs at  
MetraOnline.com