


HOW IS IT MADE?



SuperGuard™
REINFORCED SHIELD

- Commercial grade, ceramic-enhanced urethane ensures performance under heavy foot traffic*

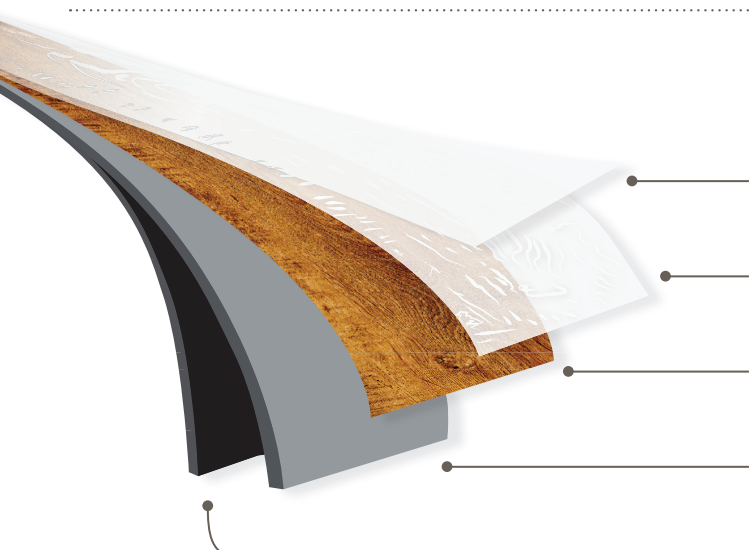

DuoPro™
WEAR LAYER

- Helps resist dents, scrapes and scratches
- Easy to clean and maintain



TrueVHD™
PRINT LAYER

- The largest print HD Print cylinders in the industry
- Create the most realistic, true visuals in the market



CoreLink™
PVC LAYER

- Solid PVC inner core in densely constructed to provide stability and sound insulation while linking all of your LVT layers together



SmartBase™
BACKING

- Solid PVC backing provides foundation strength, stability and ease of installation

*SuperGuard Tech only applies to 20 Mil products, Elixen and Bellant.

Mohawk Group PROSERIES™ LUXURY VINYL FLOORING

Distributed by  **daltile®**

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
DalTile® products and information,
visit our website at daltile.com/LVF

Mohawk Group
PROSERIES™
LUXURY VINYL FLOORING
Distributed by 

©2019 Dal-Tile Corporation (04/19)

2.0 mm | 6 Mil
TRAVANE™
GLUE DOWN



DESIGN & SIZE


Product Type: Glue Down LVT
 Thickness: 2.0 mm
 Wear Layer: 6 Mil (0.1524 mm)
 Finish: Enhanced Urethane
 Size (nominal): 6" W x 48" L Plank
 Size (actual): 152.4 mm x 1219.2 mm
 Packaging: 54 sq. ft. per carton / 27 pieces per carton
 Weight: 1.35 lbs per piece / 37.7 lbs per carton
 Installation & Adhesive: Glue down and install using ProSeries by Daltile Adhesive; see daltile.com/LVF for more recommended installation and adhesive information



GOLDEN OAK
TV35




NATURAL
TV30




BIRCH WHITE
TV32



WHEATWOOD
TV31



WEATHERED
PINE TV33



WALNUT
TV34

2.5 mm | 20 Mil
ELIXEN™
GLUE DOWN




DESIGN & SIZE


Product Type: Glue Down LVT
 Thickness: 2.5 mm
 Wear Layer: 20 Mil (0.508 mm)
 Finish: SuperGuard™ Technology
 Size (nominal): 7" W x 47" L Plank
 Size (actual): 180 mm x 1,200 mm
 Packaging: 34.88 sq. ft. per carton / 15 pieces per carton
 Weight: 1.94 lbs per piece / 30.2 lbs per carton
 Installation & Adhesive: Glue down and install using ProSeries by Daltile Adhesive; see daltile.com/LVF for more recommended installation and adhesive information



SONOMA OAK
EX30




WHITE OAK
EX31



VINTAGE PINE
EX32



ASHWOOD
EX33



DRIFTWOOD
EX34




EXOTIC TEAK
EX35



BALCK WALNUT
EX36



RUSTIC JAVA
EX37




ROSEWOOD
EX38

2.0 mm | 12 Mil
CYROSE™
GLUE DOWN



DESIGN & SIZE


Product Type: Glue Down LVT
 Thickness: 2.0 mm
 Wear Layer: 12 Mil (0.3048 mm)
 Finish: Enhanced Urethane
 Size (nominal): 6" W x 48" L Plank
 Size (actual): 152.4 mm x 1,219.2 mm
 Packaging: 54 sq. ft. per carton / 27 pieces per carton
 Weight: 1.35 lbs per piece / 37.7 lbs per carton
 Installation & Adhesive: Glue down and install using ProSeries by Daltile Adhesive; see daltile.com/LVF for more recommended installation and adhesive information



WHITE ASH
CY30



COASTAL GREY
CY31



BARNWOOD
CY34



HONEY MAPLE
CY32



EARLY AMERICAN
CY33

2.5 mm | 20 Mil
BELLANT™
GLUE DOWN



DESIGN & SIZE


Product Type: Glue Down LVT
 Thickness: 2.5 mm
 Wear Layer: 20 Mil (0.508 mm)
 Finish: SuperGuard™ Technology
 Size (nominal): 36" x 36" (Concrete)
 18" x 18" (Fabric & Encaustic)
 Size (actual): 914.4 mm x 914.4 mm (Concrete)
 457.2 x 457.2 (Fabric & Encaustic)
 Packaging: 54 sq ft/carton / 6 pc/carton (Concrete)
 36 sq ft/carton / 16 pc/carton (Fabric & Encaustic)
 Weight: 7.5 lbs per piece / 46.1 lbs per carton (Concrete)
 1.9 lbs per piece / 31.1 lbs per carton (Fabric & Encaustic)
 Installation & Adhesive: Glue down and install using ProSeries by Daltile Adhesive; see daltile.com/LVF for more recommended installation and adhesive information



NATURAL BEIGE
BL30



WARM GREY
BL31



CONCRETE GREY
BL32



MIDNIGHT BLACK
BL33



WOVEN WHITE
BL34



WOVEN GREY
BL35



CAFÉ
BL36