


10-BAY BATTERY CHARGER



N 2 G R O U P™

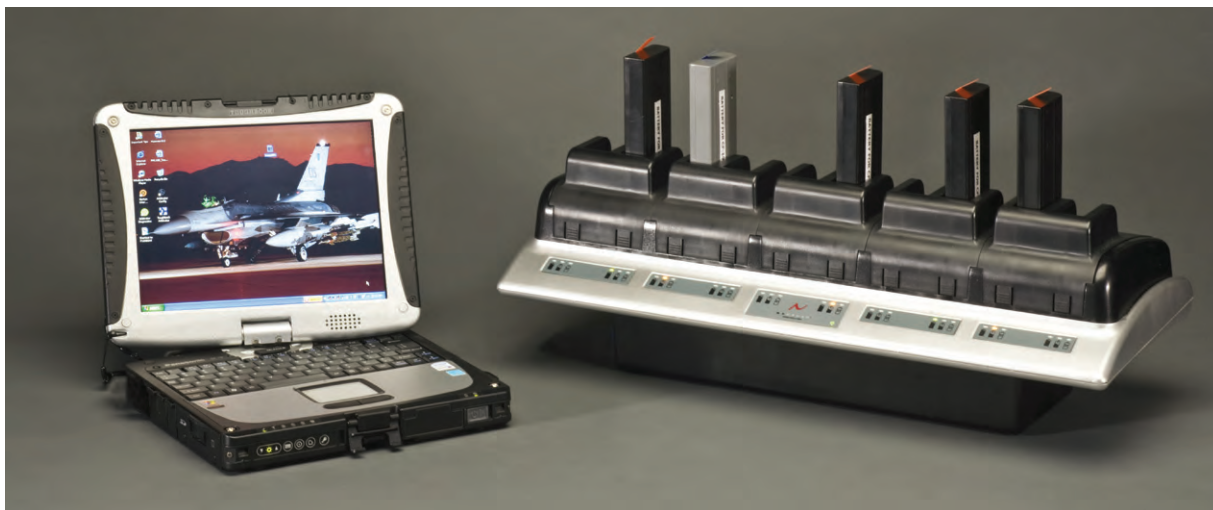

CAPACITIES

Durable 10-Bay Charger

CHARGING

4 Hours –10 Batteries

Charge Power 15W max

Discharger Power 3W max

INTELLIGENT

Integrated smart technology
optimizing battery life cycle
management

Maintenance safety mode features with
user friendly LED alerts



WWW.RIDGELINE-TECH.COM

888.660.8688

ELECTRICAL

100 to 120V (60Hz ~ 4.3A)

220 to 240V (50Hz ~ 1.8A)

TEMPERATURE

Operational 41°F to 95°F (5°C to 35°C)

Non-operational 14°F to 140°F (-10°C to 60°C)

DIMENSIONS

Length: 8.9in (226.06mm)

Width: 21.9in (556.26mm)

Height: 6.7in (170.18mm)

Weight: 12lbs (5kg)

CERTIFICATIONS

UL, FCC, CE & CSA compliant

PART NUMBERS

PANASONIC PRODUCT

MBC10-29/30/31/51/52

MBC10-18/19

GD ITRONIX PRODUCT

MBC10-MR1

GETAC PRODUCT

MBC10-GETAC



N 2 G R O U P

2-BAY BATTERY CHARGER



CAPACITIES

Durable 2-Bay Charger

CHARGING

4 Hours –2 Batteries

Charge Power 15W max

Discharger Power 3W max

INTELLIGENT

Integrated smart technology optimizing battery life cycle management

Maintenance safety mode features with user friendly LED alerts

ELECTRICAL

100 to 120V (60Hz ~ 4.3A)

220 to 240V (50Hz ~ 1.8A)

TEMPERATURE

Operational 41°F to 95°F (5°C to 35°C)

Non-operational 14°F to 140°F (-10°C to 60°C)

DIMENSIONS

Length: 9.5in (241.3mm)

Width: 6.5in (165.1mm)

Height: 3.75in (95mm)

Weight: 1.25lbs (.6kg)

CERTIFICATIONS

UL, FCC, CE & CSA compliant

PART NUMBERS

GD ITRONIX PRODUCT

MBC2-MR1


PANASONIC PRODUCT

MBC2-29/30/31/51/52

MBC2-18/19

GETAC PRODUCT

MBC2-GETAC

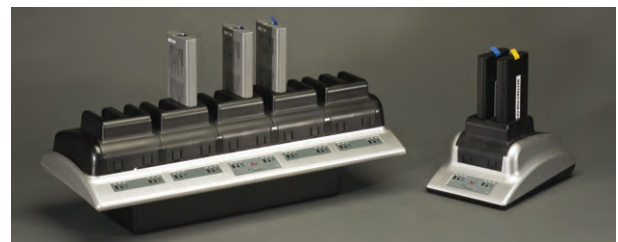

Ridgeline[™]
T E C H N O L O G Y

WWW.RIDGELINE-TECH.COM

888.660.8688