


**PROJECT** FIRM TYPE DATE

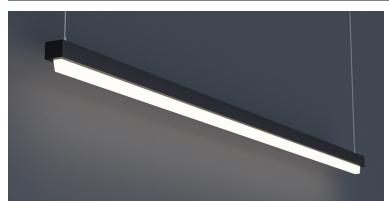

Architectural luminaire with extremely low profile. For use in indoor applications where an LED luminaire with small profile providing continuous light is required.

#### **FEATURES**

- Available In Made To Measure Lengths Accurate Up To 1/16"
- 100 Direct Lighting
- Special Diffuse Acrylic Drop Lens With 260 Degree Distribution
- Damp Location Rated
- CRI 90+ Standard; R9>50
- 5 Year, 50,000 Hour Fixture Warranty
- 3000K & 3500K Color Temperatures Available
- Available with PoE

APPLICATIONS	Offices Lobbies	Retail Stores	Classrooms	. Reception Areas & Corridors
AFFLICATIONS	OTTICES, LUDDIES	, INCLAIL SLUICS	, Ciassi Uullis	, Neception Aleas & Comucis

CONSTRUCTION Extruded Aluminum Housing with Die Cast Ends. **OPTICS** Satin PMMA Lens, No LED Imaging

WARRANTY 5 Year Limited Warranty (Covers Standard Components) **FINISH** Standard Powder-Coated Black, Custom RAL Colors Available

**FIXTURE RATINGS & CERTIFICATIONS** 

Union Made ETL Listed

Made In The USA Damp Location Rated



#### **DRIVERS & SENSORS**


For Wiring Diagrams and Sensor Information Click Here



**EXTRUSION** 

**ELECTRICAL** 

# **DIMENSIONS**



Remote Driver with 0-10V Dimming Standard

#### LED SYSTEM INFORMATION

	Nominal System Watts	Nominal Delivered Lumens
Standard (LTG1)	5 W/ft	205 lm/ft
Low (LTG2)	3 W/ft	125 lm/ft

Based on a 3500K luminaire using one driver. Custom outputs available; specify below.

**ORDERING** 

MILAN

1-FIXTURE ID

2 - LENGTH

X'-X" - Specify Length

**2** - 2 ft

**4** - 4 ft

8 - 8 ft

3 - COLOR TEMP

30 - 3000K/90 CRI 35 - 3500K/90 CRI

4 - LED SYSTEM

LTG1 - Standard LTG2 - Low

5 - VOLTAGE

UNV - Universal (120/277V) 6 - DRIVER (Remote)

**DB** - Standard Dimming (0-10V) PoE - Power over Ethernet. Consult Factory for Compatibility

## 7-FINISH

BLK - Black (Standard)

**W**\* - White

CC\* - Custom Color (provide RAL#)

\*White cord and canopy provided. Must specify for other requests

# 8 - MOUNTING

AC - Air Craft Cable (50") SM - Surface Mount

# 9 - OTHER OPTIONS

EM 120V - Emergency Pack EM 277V - Emergency Pack EMCKT - Emergency Circuit


Updated: 05/15/2019



DATE PROJECT FIRM TYPE

## **MOUNTING OPTIONS**

**SM** - Surface Mount

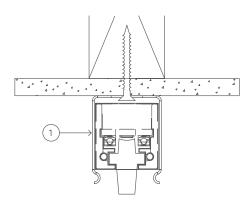

1 - Surface Mount Clip