Reformation

Porcelain Stone®



Reformation

Porcelain Stone®

Be a part of the revolution with Reformation

Revolutionize the way you see concrete with Reformation from Crossville. Concrete visuals with movement, pitting, aggregate, and sheen variation are reinterpreted in stylish planks, creating a completely contemporary look. Digital Plus technology provides ultra realistic graphics, and Crossville's quality provides a guaranteed level of sophistication and performance unheard of in traditional materials.

Reformation is available in two cool greys and 2 warm neutrals, all in 3 plank sizes. Bullnose and cove base complement Reformation, along with a traditional and block mosaic.

Join the revolution and reform your design style... with Crossville.

- Complementary light and dark tones
- New block mosaic along with a standard 2x2 square mosaic
- · Coordinating trim available







Wall: **RFM03** ► Ideology 6 x 36 UPS Floor: **RFM04** ► March On 24 x 36 UPS

Color Palette


Available Colors




RFM01 ▶ New Day UPS



RFM03 ▶ Ideology UPS



RFM02 ▶ Rally Cry UPS



RFM04 ▶ March On UPS

2 x 2 Square Mosaics



RFM01.10202MOS New Day UPS



RFM01.1BLCKMOS New Day UPS


Block Mosaics



Block Mosaic Pattern 1



Block Mosaic Pattern 2



RFM02.10202MOS Rally Cry UPS



RFM02.1BLCKMOS Rally Cry UPS



Block Mosaic Pattern 3




Block Mosaic Pattern 4



RFM03.10202MOS Ideology UPS




RFM03.1BLCKM0S Ideology UPS

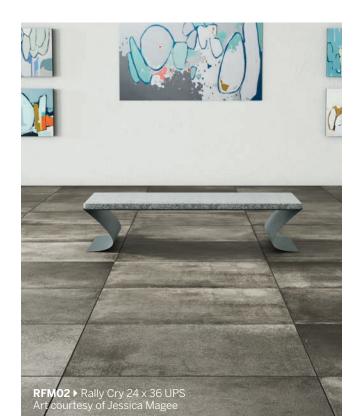



RFM04.10202MOS March On UPS



RFM04.1BLCKM0S March On UPS

Specifications

Sizes (Shown in RFM04)









2 x 2 Square Mosaic UPS Finish (Mounted on a 12 x 12 sheet.)



Block Mosaic UPS Finish (Mounted on a 12 x 12 sheet.)

Get Planked!

Our Porcelain Stone® products are available in popular plank shapes with no minimum order and quick fulfillment.

See website for more details and sizes.



Sizes & Finishes

4	Field Tile		Available in all colors	
	Nominal (in)	Actual (mm)	Thickness (mm)	Finish
	6 x 36	147 x 897	10.5	UPS
	12 x 36	297 x 897	10.5	UPS
	24 x 36	597 x 897	10.5	UPS

Crossville recommends a grout joint of $3 \mathrm{mm}.$

Actual measurements stated in inches indicate tile is calibrated (non-rectified)

Actual measurements stated in mm indicate tile is rectified

Mosaics		Available in all colors	
Nominal (in)	Sheet Size (mm)	Thickness (mm)	Finish
2 x 2 Square Mosaic	298 x 298	10.5	UPS
Block Mosaic	297 x 297	10.5	UPS

^{*}Mounted on 12 v 12 sheet

Coordinating Trim

Occidinating irini			
Nominal (in)	Actual (mm)	Thickness (mm)	Finish
6 x 12 Cove Base	150 x 297	10	UPS
6 x 18 Single Bullnose	147 x 447	10.5	UPS





Product Performance

Breaking Strength	>500 lbf	ASTM C648
Bond Strength	>200 psi	ASTM C482
Chemical Resistance	Unaffected	ASTM C650
Frost Resistance	Resistant	ASTM C1026
Water Absorption	<0.20%	ASTM C373
Scratch Hardness	7	Mohs Scale

Wet Dynamic Coefficient f Friction Range

UPS	0.42 - 0.52	AcuTestsm

Shade & Texture Index

Reformation has a shade variation of V4.



This porcelain tile product is produced with a V4 variation. Expect that the amount of color and texture on each piece may vary significantly. Inspect the product upon delivery and for best results, blend tile from several cartons during installation.

V4 Substantial Variation

Reformation

Crossville, Inc.

PO Box 1168 Crossville, TN 38557 **Phone** 931.484.2110 **Fax** 931.456.2956

E-Mail Crossc@CrossvilleInc.com
Web CrossvilleInc.com

Recommended Use

Reformation is recommended for interior floors, walls, countertops, and exterior walls in both residential and commercial applications. Reformation is not recommended for exterior horizontal surfaces or exterior paving. If offset pattern is required for tiles 15 inches or longer, Crossville® recommends an offset of not greater than 33%. See CrossvilleInc.com for detailed installation instructions.

Wet Area Use for Reformation Mosaics

Crossville® produces the Reformation 2×2 and Block mosaics with the Cross-Sheen® (UPS) finish. The AcuTestsm wet Dynamic COF of Reformation is \geq 0.42. Their small sizes ensure frequent grout joints which provides traction and drainage.

Crossville cannot control situations involving incorrect installation, improper slope to the drain for elimination of standing water and poor surface cleaning.

This information is provided so that customers may make a realistic and informed decision when comparing Reformation to other tile products in wet area environments, such as residential/commercial bathrooms, showers, and interior pool decks.

Information listed here is subject to change. Please refer to CrossvilleInc.com for the latest, most accurate information.

Photo right:

RFM01 ▶ New Day 24 x 36 UPS

On the cover:

Wall: RFMO1 ▶ New Day 6 x 36 UPS Floor: RFMO2 ▶ Rally Cry 12 x 36 UPS Shower Floor: RFMO2 ▶ Rally Cry Block

Mosaic UPS

Care and Maintenance

Regular cleaning is the best way to keep Reformation tile looking good for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth. No waxes are needed. More information regarding the care and maintenance of Crossville® products is available at CrossvilleInc. com.

Hydrotect

Our porcelain tiles are available with Hydrotect. Crossville's revolutionary invisible coating harnesses the power of light, water, and oxygen to create the best defense against dirt and pollution. Whether indoors or out, floors and walls stay cleaner, providing a superior experience in any space. For complete details check our website at Crossvillelnc.com.

* HYDROTECT

by CROSSVILLE.



Trade Organizations







