



URL: <https://online.pubhtml5.com/zbku/xagv/#p=1>

Screenshot taken: April 7, 2022

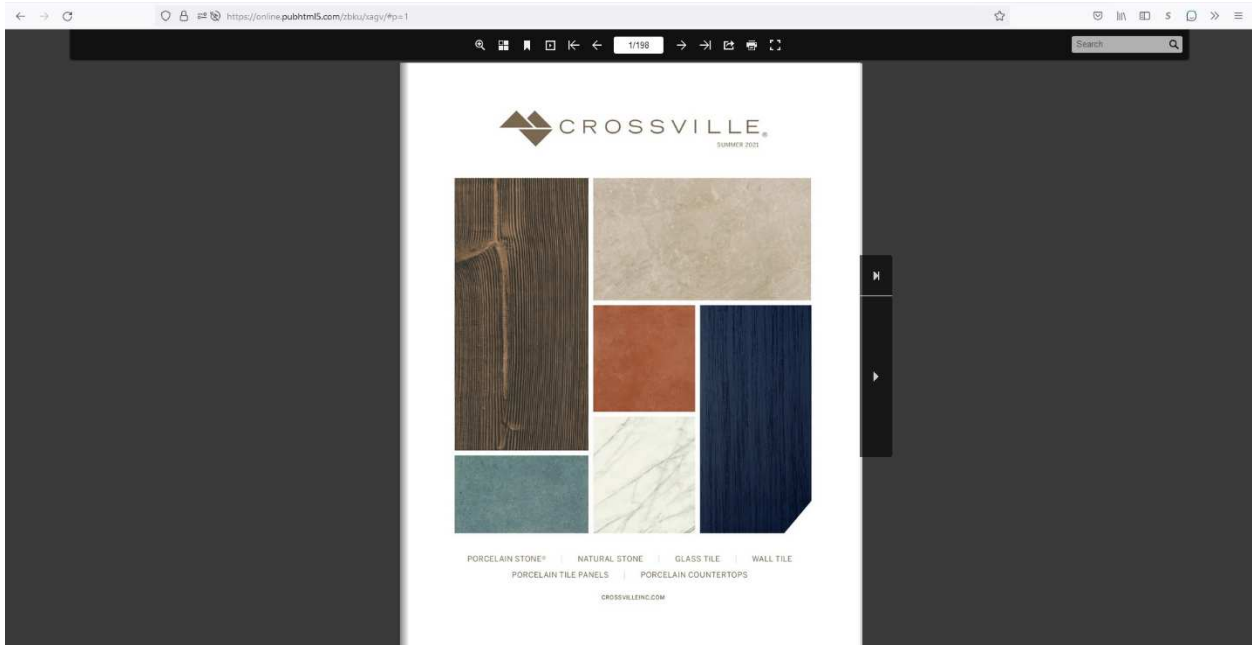

URL: <https://online.pubhtml5.com/zbku/xagv/#p=46>

Screenshot taken: April 7, 2022

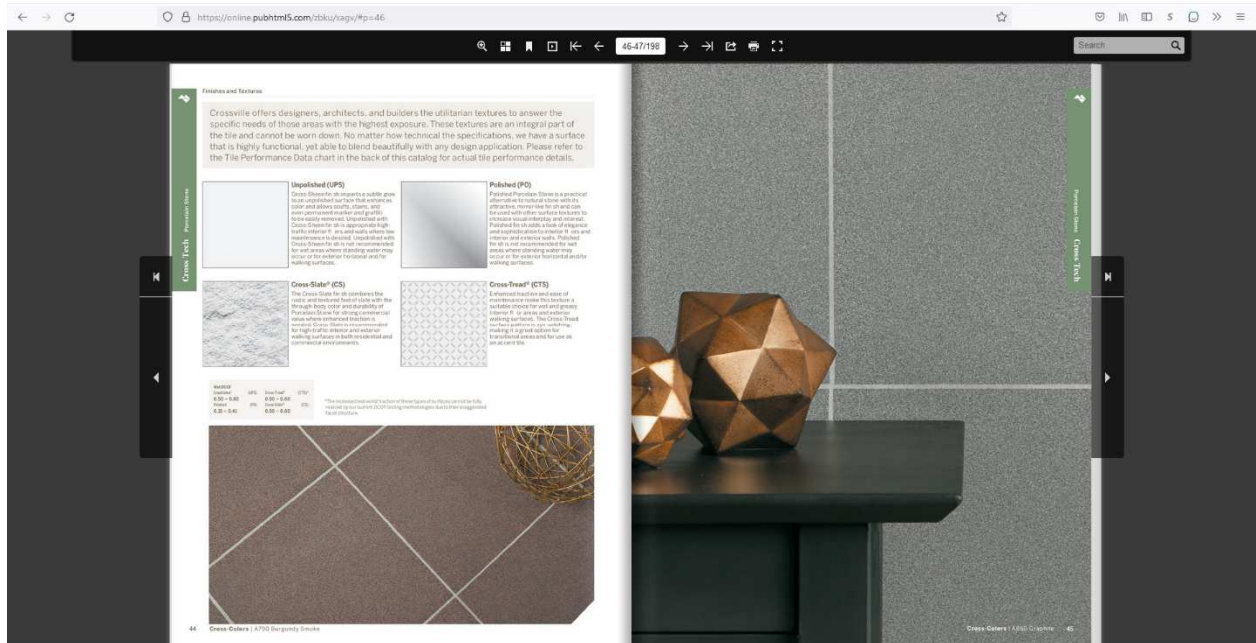



Finishes and Textures

Cross-Tech Porcelain Stone

Crossville offers designers, architects, and builders the utilitarian textures to answer the specific needs of those areas with the highest exposure. These textures are an integral part of the tile and cannot be worn down. No matter how technical the specifications, we have a surface that is highly functional, yet able to blend beautifully with any design application. Please refer to the Tile Performance Data chart in the back of this catalog for actual tile performance details.



Unpolished (UPS)

Cross-Sheen finish imparts a subtle glow to an unpolished surface that enhances color and allows scuffs, stains, and even permanent marker and graffiti to be easily removed. Unpolished with Cross-Sheen finish is appropriate high-traffic interior floors and walls where low maintenance is desired. Unpolished with Cross-Sheen finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.



Polished (PO)

Polished Porcelain Stone is a practical alternative to natural stone with its attractive, mirror-like finish and can be used with other surface textures to increase visual interplay and interest. Polished finish adds a look of elegance and sophistication to interior floors and interior and exterior walls. Polished finish is not recommended for wet areas where standing water may occur or for exterior horizontal and/or walking surfaces.



Cross-Slate® (CS)

The Cross-Slate finish combines the rustic and textured feel of slate with the through-body color and durability of Porcelain Stone for strong commercial value where enhanced traction is needed. Cross-Slate is recommended for high-traffic interior and exterior walking surfaces in both residential and commercial environments.



Cross-Tread® (CTS)

Enhanced traction and ease of maintenance make this texture a suitable choice for wet and greasy interior floors and exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile.

Wet DCOF	(UPS)	Cross-Tread® (CTS)*
Unpolished	0.50 - 0.60	0.50 - 0.60
Polished	(PO)	Cross-Slate® (CS)
0.31 - 0.41		0.50 - 0.60

*The increased real world traction of these types of surfaces cannot be fully realized by our current DCOF testing methodologies due to their exaggerated facial structure.



